




# CITEL



## Protection of video surveillance systems against overvoltages

### MSP-VM24

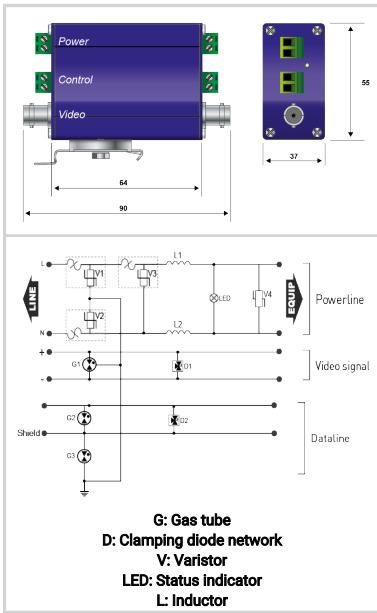

Electrical Characteristics		
SPD type	IEC	2+3
Network		24 Vac/Vdc
Nominal line voltage	Un	24 Vac/Vdc
Max. DC operating voltage	Uc	30 Vac/Vdc
Insertion loss		< 0.1 dB
Max. load current @25°C	IL	5 A
Max. load current @25°C	IL	300 mA
Nominal discharge current 15 x 8/20 μs impulses	In	5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	10 kA
Nominal discharge current C2 Category	In	2.5 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc	10 kV / 5 kA
Protection mode(s)		Common/Differential mode
Protection level @ In (8/20μs)	Up	0.22 kV
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up	20 V
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)	Up	20 V
Protection level L/N @ In (8/20μs)	Up L/N	0.22 kV
Protection level L/PE @ In (8/20μs)	Up L/PE	0.22 kV
ELEC		
Network		Signal video
ELEC		
Max. DC operating voltage	Uc	6 Vdc
ELEC		
Max. frequency	f max.	100 Mhz
ELEC		
Insertion loss		< 1dB
ELEC		
Protection level @ In (8/20μs)	Up	20 V
ELEC		
Network		1 pair signal 0-5 V
ELEC		
Max. DC operating voltage	Uc	8 Vdc
ELEC		
Max. frequency	f max.	16 MHz
ELEC		
Insertion loss		< 1dB
ELEC		
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	5 kA
ELEC		
Nominal discharge current C2 Category	In	2.5 kA
ELEC		
Protection level @ In (8/20μs)	Up	20 V
Mechanical Characteristics		
Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5mm <sup>2</sup> max.
Format		DIN rail or flange
Mounting		DIN rail or plate (flange)
Housing material		Anodized aluminum
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection and Power cut off



# CITEL

### MSP-VM24

Disconnection indicator	Green LED OFF and line cut off
Operating indicator	Green led(s) on
Dimensions	See diagram
<b>Disconnectors</b>	
Thermal disconnecter	Internal
<b>Standards</b>	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
<b>Part number</b>	
<b>420402</b>	

