




# CITEL



## Type 1+2 AC surge protector - 1-pole

### DS500E-320

- Type 1+2 unipolar AC surge protector
- I<sub>imp</sub> : 50 kA on 10/350µs impulse
- I<sub>max</sub> : 200 kA on 8/20µs impulse
- Internal disconnections, status indicator and remote signaling
- IEC 61643-11 and EN 61643-11

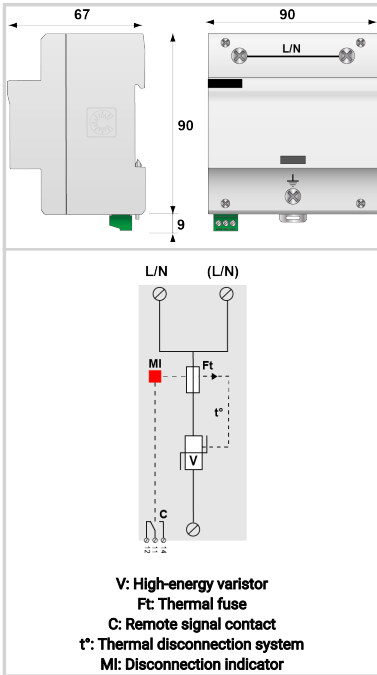

#### Electrical Characteristics

SPD type	IEC	1+2
Network		230/400 V
Max. AC operating voltage	U <sub>c</sub>	320 Vac
Max. load current <i>if series connection</i>	I <sub>L</sub>	100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT	440 Vac disconnection
Residual Current <i>Leakage current to Ground</i>	I <sub>pe</sub>	< 3 mA
Follow current	I <sub>f</sub>	None
Nominal discharge current <i>15 x 8/20 µs impulses</i>	I <sub>n</sub>	50 kA
Max. discharge current <i>max. withstand @ 8/20 µs by pole</i>	I <sub>max</sub>	200 kA
Impulse current by pole <i>max. withstand 10/350µs by pole</i>	I <sub>imp</sub>	50 kA
Specific energy by pole <i>max. withstand 10/350 µs</i>	W/R	625 kJ/ohm
Connection mode(s)		L/N and L/PE
Protection level <i>@ I<sub>n</sub> (8/20µs)</i>	U <sub>p</sub>	1.8 kV
Residual voltage at 5 kA <i>@ 5 kA (8/20µs)</i>	U <sub>p-5kA</sub>	0.9 kV
Admissible short-circuit current	I <sub>sc cr</sub>	50 000 A

#### Mechanical Characteristics

Technology		MOV
Connection to Network		By screw terminals: 6-35mm <sup>2</sup>
Format		1-pole modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram

#### Disconnectors

Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses Type gG - 500 A

#### Standards

Standards compliance		IEC 61643-11 / EN 61643-11
Certification		

#### Part number

**63166**

