




# CITEL



## MSP-VM24-2P

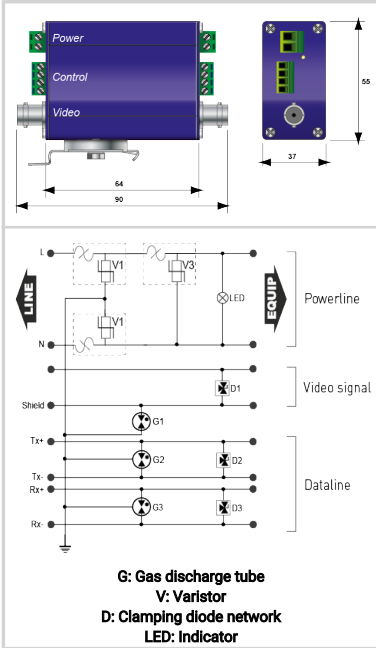

### Electrical Characteristics

Network		24 Vac/Vdc
Max. DC operating voltage	Uc	30 Vac/Vdc
Max. frequency	f max.	16 MHz
Insertion loss		< 0.1 dB
Max. load current @25°C	IL	5 A
Nominal discharge current 15 x 8/20 μs impulses	In	5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc	10 kV / 5 kA
Protection mode(s)		Common/Differential mode
Protection level @ In (8/20μs)	Up	0.22 kV
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up	0.22 kV
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)	Up	0.22 kV

### Mechanical Characteristics

Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5mm <sup>2</sup> max.
Format		DIN rail or flange
Mounting		DIN rail or plate (flange)
Housing material		Anodized aluminum
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection and Power cut off
Disconnection indicator		LED green OFF and AC network cut-off
Dimensions		See diagram

### Standards

Standards compliance		IEC 61643-21 / EN 61643-21
----------------------	--	----------------------------

### Part number

420432		
--------	--	--

