


ESP-230



- ✦ Electrostatic protectors
- ✦ For Class II Led lighting
- ✦ Comply class II safety rules
- ✦ Very compact
- ✦ Plate mounting
- ✦ Wire connection

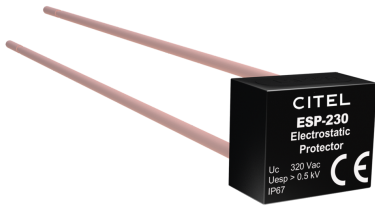

Electrical Characteristics		
Network		220-240 V Single-phase
Nominal line voltage	Un	220-240 Vac
Max. AC operating voltage	Uc	320 Vac
Residual Current Leakage current to Ground	Ipe	None
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50µs - 8/20µs	Uoc	10 kV / 5 kA
Withstand on overvoltages IEEE C62.41.1		10 kV / 10 kA
Electrostatic protection level	Uesp	> 0.5 kV
Electrostatic protection mode		N/Functional Earth
Mechanical Characteristics		
Connection to Network		2 wires (multistrand) of 1mm ² max.
Mounting		On plate
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP67
Remote signaling of disconnection		No
Dimensions		See diagram
Weight		0.011 kg
Standards		
Certification		
Part number		
354913		