


MLPC1-277L-V



- ✦ UL Type 2CA surge protectors for Led lighting
- ✦ Very compact,
- ✦ Plate mounting
- ✦ Screw terminal connection,
- ✦ Status indicator,
- ✦ End of life AC Disconnection
- ✦ EN 61643-11 compliance

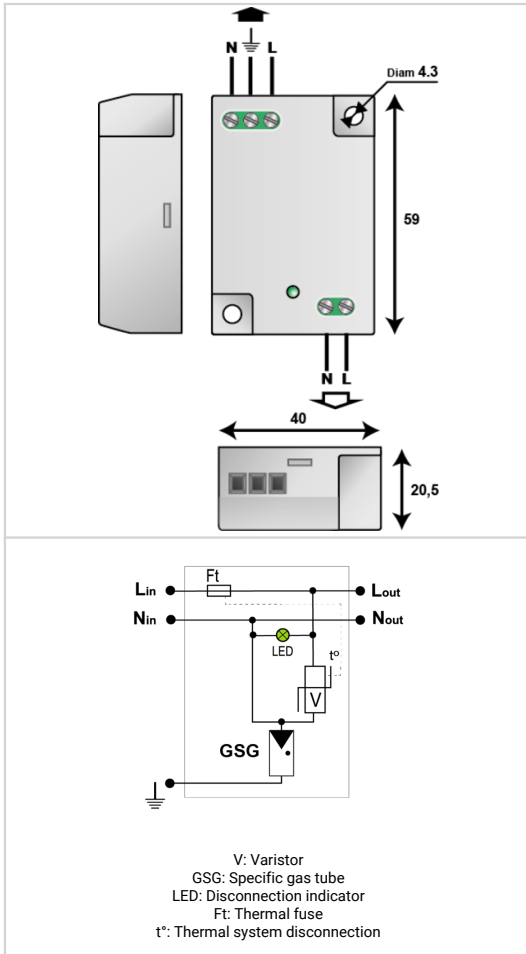

Electrical Characteristics		
SPD type	IEC	2 (or 3)
AC system		2W+G (Single Phase)
Nominal line voltage	Un	100 V-277 V
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	U _{oc}	10 kV
Mechanical Characteristics		
Housing material		Thermoplastic UL94 V-0
Disconnection indicator		LED green OFF and AC network cut-off
Standards		
Certification		UL Listed / IEC / IMQ
Part number		831321