


### OFI120-WW-48/240-U

3 flashheads OFP-120-RW-10L-U with :

- ✦ 2 led projectors IP66
- ✦ Aluminium and glass envelope
- ✦ Vertical stainless support

Power supply :

- ✦ Stainless enclosure with interlock switch and cable entry at the bottom
- ✦ Surge protection included
- ✦ Alarm relay in case of projector failure or power supply failure
- ✦ Test button with auto/day/night modes
- ✦ 8 led indicators for easy diagnostic

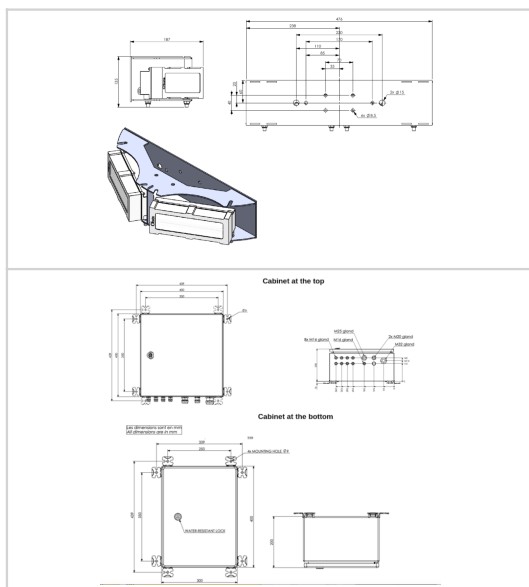

| ELEKTRISCHE EIGENSCHAFTEN                            |                                                                                                                                                                                |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Durchschnittliche wattzahl                           | 55W (day time), 8W (night mode)                                                                                                                                                |
| PHOTOMETRISCHE EIGENSCHAFTEN                         |                                                                                                                                                                                |
| Effective light output day time at 0° on site        | 20 000cd (white)                                                                                                                                                               |
| Effective light output twilight mode at 0° on site   | 20 000cd (white)                                                                                                                                                               |
| Effektive Lichtausbeute im Nachtmodus bei 0° vor Ort | 2000cd (white)                                                                                                                                                                 |
| Color day/twilight time                              | white                                                                                                                                                                          |
| Farbe Nachtzeit                                      | Weiss                                                                                                                                                                          |
| Vertikaler Strahlengang                              | 3°                                                                                                                                                                             |
| Horizontale Strahlausbreitung                        | 360° with minimum 3 flashheads fixed at 120° around the obstacle                                                                                                               |
| Blitzlicht pro Minute                                | 40                                                                                                                                                                             |
| MECHANISCHE EIGENSCHAFTEN                            |                                                                                                                                                                                |
| Wiring                                               | For each projector, 10 meters of molded cable For power supply, 1 plug per projector + entry of power & signal cable by glands nickel plated brass and connection by terminals |
| Temperaturbereich                                    | Tu -40/+55°C                                                                                                                                                                   |
| Größe der Leuchte                                    | 120mm (height) x 480mm (width)                                                                                                                                                 |
| Größe des Netzteils                                  | 400mm (height) x 300mm (width) x 200mm (dept)                                                                                                                                  |
| NORMEN                                               |                                                                                                                                                                                |
| Normkonform nach                                     | ICAO Anhang 14 Kapitel 6, FAA (AC 150/5345-43J), UK MOD, Transport Canada                                                                                                      |
| Zulassungen                                          | FAA (AC 150/5345-43J), ETL certified, DGAC(Fr)                                                                                                                                 |
| Artikel Nummer                                       |                                                                                                                                                                                |
| 113757U                                              |                                                                                                                                                                                |