



MLPVM2-230L-5A

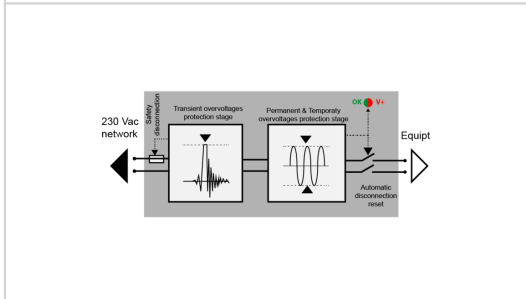

- ✦ Protection against all types of overvoltages
- ✦ For Class II Led lighting
- ✦ 230 V single-phase network / 5 A
- ✦ Function 'Surge voltage protection' (SPD)
- ✦ Surges due to lighting or switching
- ✦ Function 'Permanent or temporary overvoltage protection' (POP)

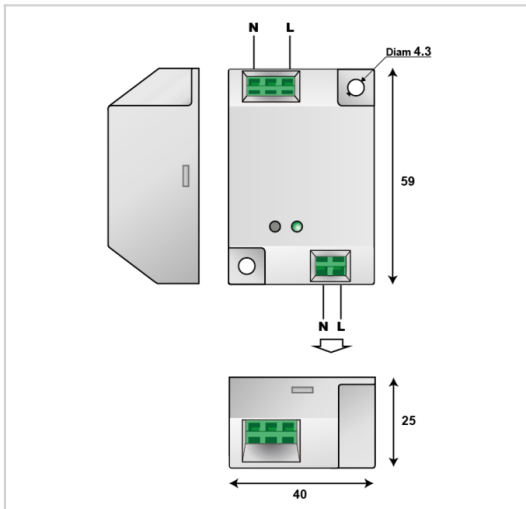

Electrical Characteristics	
Network	230 V single-phase
AC system	TT-TN
Max. AC operating voltage	U _c 255 Vac
Max. load current @25°C	I _L 5 A
Residual Current Leakage current to Ground	I _{pe} None
Nominal discharge current 15 x 8/20 μs impulses	I _n 5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max} 10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	U _{oc} 10 kV
Withstand on overvoltages IEEE C62.41.1	10 kV / 10 kA
Protection mode(s)	L/N
Protection level L/N @ I _n (8/20μs)	U _p L/N 1.5 kV
Admissible short-circuit current	I _{sc} 10 000 A
Mechanical Characteristics	
Connection to Network	In series by conductors 1.5mm ² - spring terminal
Mounting	On plate
Housing material	Thermoplastic UL94 V-0
Operating temperature	T _u -40/+85°C
Protection rating	IP20
Insulation class	Classe 2
Failsafe mode	Disconnection and AC line cut-off
Disconnection indicator	Green LED OFF and line cut off
Voltage/operating indicator	Green Led ON
Dimensions	See diagram
Weight	0.040 kg
Standards	
Standards compliance	EN 61643-11 / IEC 61643-11
Certification	
Part number	
832278	