


DSH2x16



- ✦ Coordination inductors for surge protectors
- ✦ For use with the DS series
- ✦ 2 x 16 A

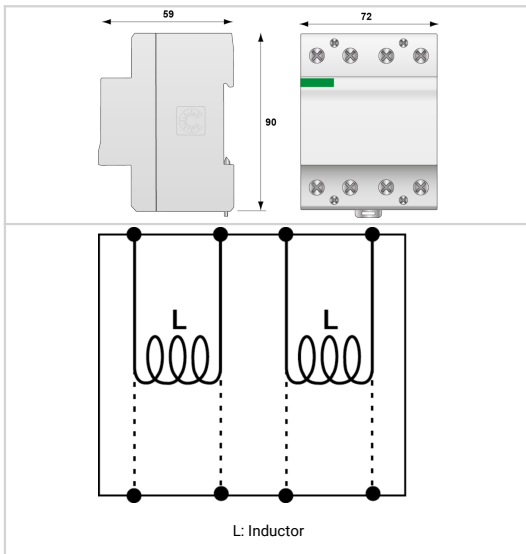

Electrical Characteristics		
Max. AC operating voltage	Uc	500 Vac
Max. load current @25°C	IL	2 x 16 A
Line inductance (± 10 %)		2 x 15 µH
Mechanical Characteristics		
Connection to Network		By screw terminals: 6-35mm <sup>2</sup>
Format		1-pole modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Wiring mode		1 DSH in series on 2 active wires
Dimensions		See diagram
Weight		0.37 kg
Part number		
2690		