





# CITEL

## Type 2 PV Surge Protector for PCB mounting

### PPV40S-10-600

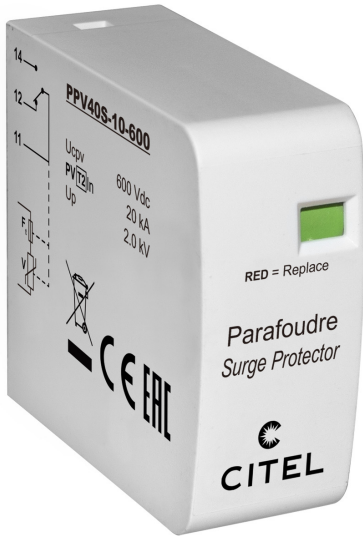

- Type 2 surge protector for Photovoltaic
- PCB mounting
- I<sub>max</sub>: 40 kA
- Remote signaling
- EN 50539-11 and IEC 61643-31 compliance\*

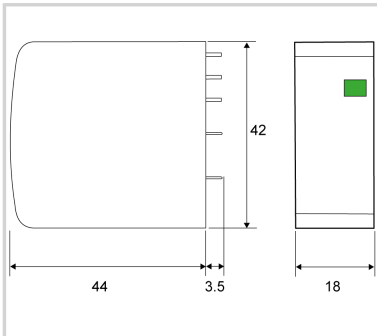

#### Electrical Characteristics

SPD type	IEC	2
Nominal PV voltage	U <sub>ocstc</sub>	600 Vdc
Max. PV operating voltage	U <sub>cpv</sub>	600 Vdc
Max. PV operating voltage (star mounting)	U <sub>cpv</sub>	1200 Vdc
Residual Current	I <sub>pe</sub>	None
Leakage current to Ground	I <sub>pe</sub>	None
PV Permanent Operating current	I <sub>cpv</sub>	< 0.1 mA
Current consumption at U <sub>cpv</sub>	I <sub>cpv</sub>	< 0.1 mA
Follow current	I <sub>f</sub>	None
Nominal discharge current	I <sub>n</sub>	20 kA
15 x 8/20 μs impulses	I <sub>n</sub>	20 kA
Max. discharge current	I <sub>max</sub>	40 kA
max. withstand @ 8/20 μs by pole	I <sub>max</sub>	40 kA
Current withstand short circuit PV	I <sub>scpv</sub>	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level	U <sub>p</sub>	2 kV
@ I <sub>n</sub> (8/20 μs)	U <sub>p</sub>	2 kV
Protection level (star mounting)	U <sub>p</sub>	4 kV
(+/-) / (+/PE or -/PE) @ I <sub>n</sub> (8/20 μs)	U <sub>p</sub>	4 kV
Protection level +/-	U <sub>p</sub>	5.1 kV
@ I <sub>n</sub> (8/20 μs)	U <sub>p</sub>	5.1 kV
Protection level +/-PE (-/PE)	U <sub>p</sub>	2.5 kV
@ I <sub>n</sub> (8/20 μs)	U <sub>p</sub>	2.5 kV

#### Mechanical Characteristics

Technology		MOV
Connection to Network		Through soldering pins
Format		Plug-in modular box
Mounting		On Printed Circuit Board
Housing material		Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection SPD of the PV line
Disconnection indicator		1 mechanical indicator
Spare module(s)		DSM50PV-600
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram

#### Disconnectors

Thermal disconnector		Internal
Back-up protection device		Without

#### Standards

Standards compliance		IEC 61643-31 / EN 50539-11 *The standard cover devices. PPV /PAC series are components. Compliant when combined is an assembly.
----------------------	--	---

#### Part number

8722203

