




# CITEL

## 1-pair DIN rail plug-in Data surge protector

### DLAWS1-06D3/R



- 1-pair Surge protection
- Pluggable protection module
- Optical fault indication
- Indirect shield connection
- Visual indicator in failsafe behaviour
- Indirect earthing
- Current circuit disconnection when module is unplugged
- Conforms to IEC 61643-21, VDE 0845-3-1 and UL497B

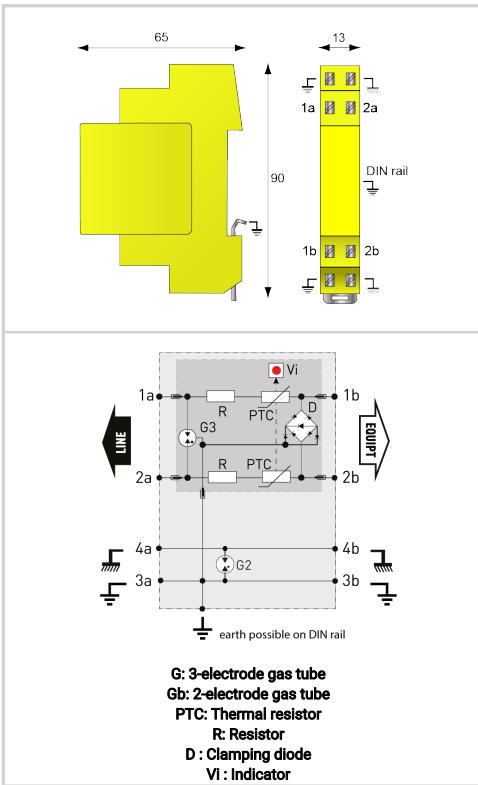

Electrical Characteristics		
Network		RS422
Nominal line voltage	Un	6 V
Max. DC operating voltage	Uc	8 Vdc
Max. frequency	f max.	3 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	300 mA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	20 kA
Nominal discharge current <i>C2 Category</i>	In	5 kA
Nominal Discharge Current, X-C (Line/Earth) <i>8/20 μs Test x 10 - C2 Category</i>	In L/PE	5 kA
Protection mode(s)		Common/Differential mode
Protection Level <i>C3 (10/1000 μs), 300 applications@10 A, Y-Y (Line/Line)</i>	Up	20 V
Protection Level <i>C3 (10/1000 μs), 300 applications@10 A, X-C (Line/Earth)</i>	Up	20 V
Impulse current <i>D1 (10/350 μs), 2 applications, X-C (Line/Earth)</i>	Iimp	5 kA
Line/Line Nominal discharge current <i>C2 Category</i>	In L/L	5 kA
Line resistance (± 10%)		4.7 Ohm
Mechanical Characteristics		
Disconnection		Specific version with line cut-off in case of removal plug-in module
Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor
SPD configuration		1-pair+shielded
Connection to Network		By spring contact terminal: 0.5-4 mm <sup>2</sup>
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Opening line - transmission cut-off - fault mode 2
With line cut-off in case of removal plug-in module		Yes
Disconnection indicator		Red light on
Spare module(s)		DLAWS1M-06D3
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Part number		
<b>6419014</b>		

