




CITEL

1-pair DIN rail plug-in Data surge protector

DLATS1-06D3/R

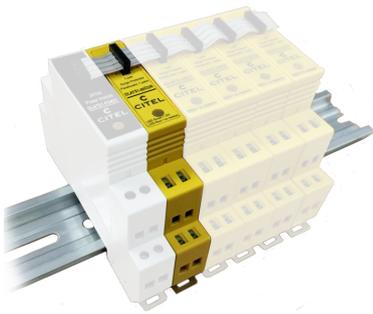

- ✦ 1-pair data line/telecom surge protection
- ✦ Local and Remote signaling of SPD status
- ✦ DIN rail mounting, Screw connect status
- ✦ Plug-in module
- ✦ 1 monitoring module + SPD modules (up to 48) + bus
- ✦ Discharge current I_{max}/I_n : 20 kA / 5kA
- ✦ Complies with IEC/EN 61643-21 and UL497B



	Electrical Characteristics																																																	
<p>G: 3-electrode gas tube Gb: 2-electrode gas tube PTC: Thermal resistor R: Resistor D: Clamping diode Vi: Indicator</p>	<table border="1"> <tr><td>Network</td><td></td><td>RS422</td></tr> <tr><td>Nominal line voltage</td><td>Un</td><td>6 V</td></tr> <tr><td>Max. DC operating voltage</td><td>Uc</td><td>8 Vdc</td></tr> <tr><td>Max. frequency</td><td>f max.</td><td>> 3 MHz</td></tr> <tr><td>Insertion loss</td><td></td><td>< 1 dB</td></tr> <tr><td>Max. load current @25°C</td><td>IL</td><td>300 mA</td></tr> <tr><td>Max. discharge current max. withstand @ 8/20 μs by pole</td><td>I_{max}</td><td>20 kA</td></tr> <tr><td>Line inductance (± 10 %)</td><td></td><td>non</td></tr> <tr><td>Protection mode(s)</td><td></td><td>Common/Differential mode</td></tr> <tr><td>Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)</td><td>Up</td><td>20 V</td></tr> <tr><td>Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)</td><td>Up</td><td>20 V</td></tr> <tr><td>Impulse current 2 x 10/350μs Test - D1 Category</td><td>I_{imp}</td><td>5 kA</td></tr> <tr><td>Nominal discharge current C2 Category</td><td>I_n</td><td>5 kA</td></tr> <tr><td>Line/Line Nominal discharge current C2 Category</td><td>I_n L/L</td><td>5 kA</td></tr> <tr><td>Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category</td><td>I_n L/PE</td><td>5 kA</td></tr> <tr><td>Line resistance (± 10%)</td><td></td><td>4.7 Ohm</td></tr> </table>		Network		RS422	Nominal line voltage	Un	6 V	Max. DC operating voltage	Uc	8 Vdc	Max. frequency	f max.	> 3 MHz	Insertion loss		< 1 dB	Max. load current @25°C	IL	300 mA	Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	20 kA	Line inductance (± 10 %)		non	Protection mode(s)		Common/Differential mode	Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	20 V	Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	20 V	Impulse current 2 x 10/350μs Test - D1 Category	I _{imp}	5 kA	Nominal discharge current C2 Category	I _n	5 kA	Line/Line Nominal discharge current C2 Category	I _n L/L	5 kA	Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category	I _n L/PE	5 kA	Line resistance (± 10%)		4.7 Ohm
Network		RS422																																																
Nominal line voltage	Un	6 V																																																
Max. DC operating voltage	Uc	8 Vdc																																																
Max. frequency	f max.	> 3 MHz																																																
Insertion loss		< 1 dB																																																
Max. load current @25°C	IL	300 mA																																																
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	20 kA																																																
Line inductance (± 10 %)		non																																																
Protection mode(s)		Common/Differential mode																																																
Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	20 V																																																
Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	20 V																																																
Impulse current 2 x 10/350μs Test - D1 Category	I _{imp}	5 kA																																																
Nominal discharge current C2 Category	I _n	5 kA																																																
Line/Line Nominal discharge current C2 Category	I _n L/L	5 kA																																																
Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category	I _n L/PE	5 kA																																																
Line resistance (± 10%)		4.7 Ohm																																																
	Mechanical Characteristics																																																	
	<table border="1"> <tr><td>Technology</td><td></td><td>GDT+Clamping diode+PTC (thermal resistor) + Resistor</td></tr> <tr><td>SPD configuration</td><td></td><td>1-pair+shielded</td></tr> <tr><td>Connection to Network</td><td></td><td>Spring terminal: cross section 0.5-2.5mm²</td></tr> <tr><td>Format</td><td></td><td>Plug-in DIN box</td></tr> <tr><td>Mounting</td><td></td><td>Symmetrical rail 35 mm (EN 60715)</td></tr> <tr><td>Housing material</td><td></td><td>Thermoplastic UL94 V-0</td></tr> <tr><td>Operating temperature</td><td>Tu</td><td>-40/+85°C</td></tr> <tr><td>Protection rating</td><td></td><td>IP20</td></tr> <tr><td>Failsafe mode</td><td></td><td>Transmission cut-off - fault mode 2 (short circuit)</td></tr> <tr><td>Disconnection indicator</td><td></td><td>Red light on</td></tr> <tr><td>Spare module(s)</td><td></td><td>DLATS1M-06D3</td></tr> <tr><td>Remote signaling of disconnection</td><td></td><td>Trough control module</td></tr> <tr><td>Remote signaling of disconnection via control module</td><td></td><td>Yes</td></tr> <tr><td>Dimensions</td><td></td><td>See diagram</td></tr> <tr><td>Weight</td><td></td><td>0.066 kg</td></tr> </table>		Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor	SPD configuration		1-pair+shielded	Connection to Network		Spring terminal: cross section 0.5-2.5mm ²	Format		Plug-in DIN box	Mounting		Symmetrical rail 35 mm (EN 60715)	Housing material		Thermoplastic UL94 V-0	Operating temperature	Tu	-40/+85°C	Protection rating		IP20	Failsafe mode		Transmission cut-off - fault mode 2 (short circuit)	Disconnection indicator		Red light on	Spare module(s)		DLATS1M-06D3	Remote signaling of disconnection		Trough control module	Remote signaling of disconnection via control module		Yes	Dimensions		See diagram	Weight		0.066 kg			
Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor																																																
SPD configuration		1-pair+shielded																																																
Connection to Network		Spring terminal: cross section 0.5-2.5mm ²																																																
Format		Plug-in DIN box																																																
Mounting		Symmetrical rail 35 mm (EN 60715)																																																
Housing material		Thermoplastic UL94 V-0																																																
Operating temperature	Tu	-40/+85°C																																																
Protection rating		IP20																																																
Failsafe mode		Transmission cut-off - fault mode 2 (short circuit)																																																
Disconnection indicator		Red light on																																																
Spare module(s)		DLATS1M-06D3																																																
Remote signaling of disconnection		Trough control module																																																
Remote signaling of disconnection via control module		Yes																																																
Dimensions		See diagram																																																
Weight		0.066 kg																																																
	Standards																																																	
	Standards compliance IEC 61643-21 / EN 61643-21 / UL497B																																																	
	Part number 6417014																																																	

