




CITEL

Support for E280 plug-in modules

MMP



- Connector strip for 2 x E280
- Max. number of pairs : 4

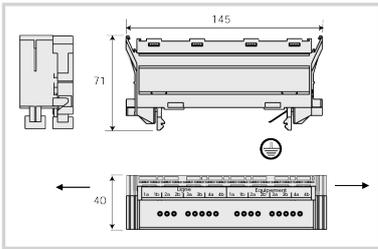

| Electrical Characteristics | | |
|---|------------------|------------------------|
| Network | | Low current |
| Max. frequency | f max. | 20 MHz |
| Insertion loss | | < 1 dB |
| Max. load current @25°C | IL | 5 A |
| Max. discharge current <i>max. withstand @ 8/20 μs by pole</i> | I _{max} | 10 kA |
| Nominal discharge current <i>C2 Category</i> | I _n | 5 kA |
| Impulse current <i>2 x 10/350 μs Test - D1 Category</i> | I _{imp} | 2.5 kA |
| Mechanical Characteristics | | |
| SPD configuration | | 4 pairs |
| Connection to Network | | Earth pin |
| Format | | Strip |
| Mounting | | MDF |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | T _u | -40/+85°C |
| Protection rating | | IP20 |
| Connection | | connector CAD |
| Max. number of E280s | | 2.0000 |
| Max. number of pairs | | 4.0000 |
| Dimensions | | See diagram |
| Part number | | |
| 71480 | | |

