



CITEL

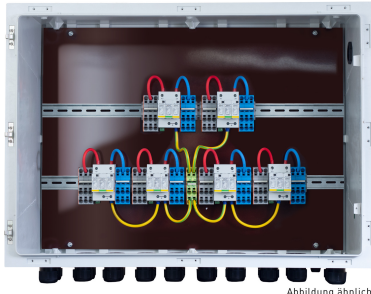


Abbildung ähnlich

PV-DC-Junction box

GAK6.K4x16.K4x16.51VG-1

- ▶ Generator junction box for 1 MPP tracker / 4 strings
- ▶ Integrated surge protection device
- ▶ Protection class IP65
- ▶ Connection via spring terminals



Electrical Characteristics		
SPD type	IEC	2
Network		PV network 1000 Vdc
Nominal DC voltage	Un-dc	1000 Vdc
Max. PV operating voltage	Ucpv	1200 Vdc
Rated insulation voltage <i>Ui</i>	Ui	1000 Vdc
Rated current <i>InA</i>	InA	6x 60 A
Rated string current	InC	6x 40 A
Mechanical Characteristics		
Input / per MPPT		Spring clamp terminals / 4x 6-16mm ²
Output / per MPPT		Spring terminals / 4x 6-16mm ²
Ground connection terminal		Spring clamp terminals / 16mm ²
Cable gland		Metric / 12x M40 (Ø 16-28mm) / 1x M20 (Ø 6-13mm)
Housing material		UV and ozone resistant, fiberglass reinforced polycarbonate
Dimensions		WxHxD (mm): 847 x 615 x 330
Ambient temperatures		Indoor: -5°C to max. +40°C (+35°C 24h average) / Outdoor: -25°C to max. +40°C (+35°C 24h average)
Humidity		Indoor: max. 50% at +40°C, max. 90% at 20°C (non-condensing) / Outdoor: 95% for a short time at +25°C (non-condensing)
Protection rating		IP 65
Protection class		Class II
Impact resistance		IK 8
Pressure compensation element		Existing
Standards		
Standards compliance		DIN EN 50539-11
Part number		
158607		

