



CITEL

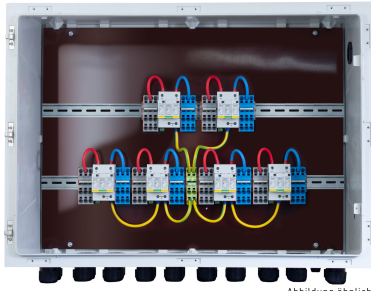


Abbildung ähnlich

PV-DC-Junction box

GAK6.K4x16.K4x16.51VG-12

- ▶ Generator junction box for 1 MPP tracker / 4 strings
- ▶ Integrated surge protection device - DS50VGPVS-1000G/12KT1 (Type 1+2)
- ▶ Protection class IP65
- ▶ Connection via spring terminals (6-16mm²)



| Electrical Characteristics | | |
|---------------------------------------|-------|---------------------------------------------------------------------------------------------------------------------------|
| SPD type | IEC | 1+2 |
| Network | | PV network 1000 Vdc |
| Nominal DC voltage | Un-dc | 1000 Vdc |
| Max. PV operating voltage | Ucpv | 1200 Vdc |
| Rated insulation voltage <i>Ui</i> | Ui | 1000 Vdc |
| Rated current <i>InA</i> | InA | 6x 60 A |
| Rated string current | InC | 6x 40 A |
| Mechanical Characteristics | | |
| Protection rating | | IP65 |
| Input / per MPPT | | Spring clamp terminals / 4x 6-16mm ² |
| Output / per MPPT | | Spring terminals / 4x 6-16mm ² |
| Cable gland | | Metric / 12x M40 (Ø 16-28mm) / 1x M20 (Ø 6-13mm) |
| Housing material | | UV and ozone resistant, fiberglass reinforced polycarbonate |
| Dimensions | | WxHxD (mm): 847 x 615 x 330 |
| Humidity | | Indoor: max. 50% at +40°C, max. 90% at 20°C (non-condensing) / Outdoor: 95% for a short time at +25°C (non-condensing) |
| Standards | | |
| Standards compliance | | DIN EN 50539-11 |
| Part number | | |
| 158609 | | |

