





CITEL

Type 1+2+3 PV surge protector - CTC Technology

DPVN1-6CVGS-21Y-1200



- Type 1+2+3 surge protector for Photovoltaic
- CTC Technology
- VG Technology
- Impulse currents I_{imp}/I_{total} : 6.25/12.5 kA (10/350 μ s)
- Common/Differential mode protection
- Remote signaling
- IEC 61643-31, EN 61643-31, EN 50539-11, UL1449 ed.5 compliance
- Certified EN 61643-31 and IEC 61643-31

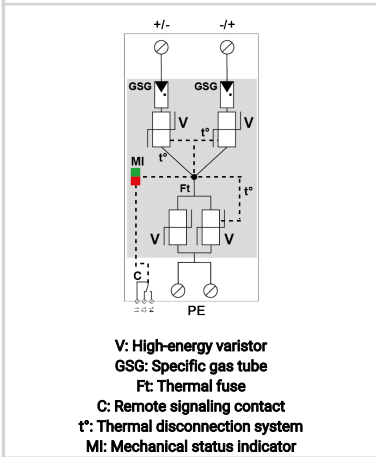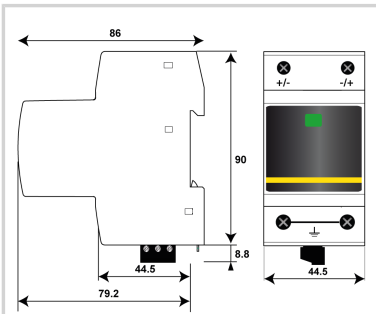

Electrical Characteristics

SPD type	IEC	1+2+3
Network		PV 1000 Vdc
Nominal PV voltage	Uocstc	1000 Vdc
Max. PV operating voltage	Ucpv	1200 Vdc
Residual Current Leakage current to Ground	Ipe	None
PV Permanent Operating current Current consumption at Ucpv	Icpv	None
Follow current	I _f	None
Nominal discharge current 15 x 8/20 μ s impulses	I _n	20 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	I _{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	I _{max} Total	60 kA
Impulse current by pole max. withstand 10/350 μ s by pole	I _{imp}	6.25 kA
Total lightning current max. total withstand @ 10/350 μ s	I _{total}	12.5 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 μ s - 8/20 μ s	Uoc	6 kV
Current withstand short circuit PV	Iscpv	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level +/- @ I _n (8/20 μ s)	U _p	4.3 kV
Protection level +/-PE (-/PE) @ I _n (8/20 μ s)	U _p	4.3 kV
Protection level at 5 kA @ 5 kA (8/20 μ s)	U _p	3,6 kV

Mechanical Characteristics

Technology		VG Technology (MOV+GSG)
Connection to Network		By screw terminals: 2.5-25mm ² (35mm ²) / by bus
Format		Compact monobloc box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		All pole disconnection from PV network
Disconnection indicator		1 mechanical indicator - Red/Green
Remote signaling of disconnection		Output on changeover contact
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions		See diagram - 2.5TE (EN43880)

Disconnectors

Thermal disconnector		CTC Technology integrated
Back-up protection device		Without

Standards

Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification		KEMA

Part number

65222102

