
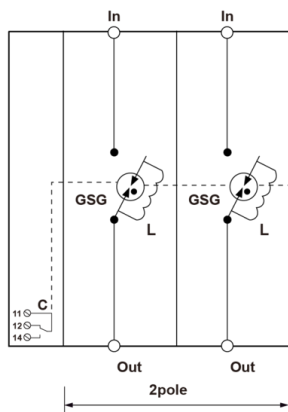


- SPD Specific Disconnectors (SSD) for short circuit protection of Type 2 AC surge protectors
- Surge current withstand: 40 kA @ 8/20µs
- Wide range of short circuit current protected
- Reusable after switch triggered
- Low rated tripping current with time-current characteristics for overcurrent coordination with upstream OCPD and safety disconnect in case of SPD failure



ELEKTRISCHE EIGENSCHAFTEN

Höchste Dauerspannung AC	Uc	400 Vac
Nennableitstoßstrom (8/20) µs / Pol	In	20 kA
15 Impulse mit In (8/20) µs		
max. Ableitstoßstrom	Imax	50 kA
max. Ableitfähigkeit 8/20 µs pro Pol		
Vorsicherung integriert		80 A
Ausschaltvermögen		100 000 A
Restspannung	Up	< 2.3 kV

MECHANISCHE EIGENSCHAFTEN

Bauart		Monoblock-Gehäuse für Hutschiennenmontage
Montage auf		35 mm Hutschiene
Temperaturbereich	Tu	-40/+85°C
Schutzart		IP20
Fernmeldesignalisierung (FS)		Potentialfreier Wechsler
Einbaumaße		Siehe Maßbild

NORMEN

Normkonform nach		GB/T 18802.11 / IEC 61643-11 / NB/T 42150
------------------	--	---

Artikel Nummer

805112