




# CITEL

## 4-pair Data surge protector unit

### B480-24D3



- 4-pair surge protection unit
- 24 V
- Removable protection circuit
- Wall mounting and screw connection
- UL497 A&B

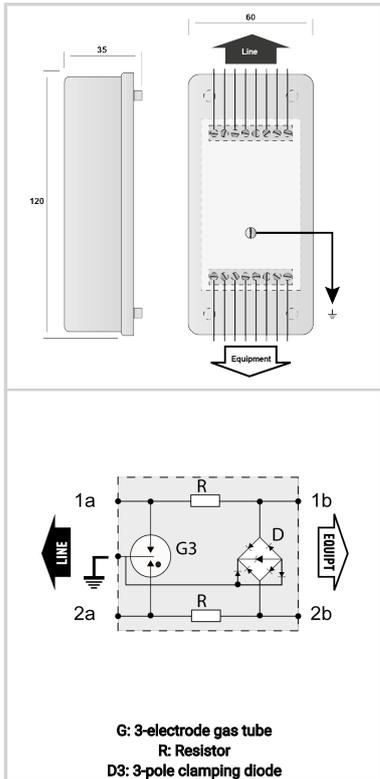

Electrical Characteristics		
Network		4-20mA, 24V
Nominal line voltage	Un	24 Vdc
Max. DC operating voltage	Uc	28 Vdc
Max. frequency	f max.	20 MHz
Insertion loss		< 1 dB
Max. discharge current max. withstand @ 8/20 $\mu$ s by pole	Imax	20 kA
Nominal Discharge Current C2 (1.2/50 $\mu$ s / 8/20 $\mu$ s), 10 applications, X-X (Line/Line)	In	5 kA
Line inductance ( $\pm$ 10 %)		non
Protection Level C3 (10/1000 $\mu$ s), 300 applications@10 A, Y-Y (Line/Line)	Up	40 V
Impulse current 2 x 10/350 $\mu$ s Test - D1 Category	Iimp	2.5 kA
Max. Load current	IL	300 mA
Type of diagram		B
Line resistance		< 4.7 Ohm
Mechanical Characteristics		
Technology		GDT + R + Diode
SPD configuration		4 pairs
Connection to Network		By screw terminal: cross section 0.4-1.5mm <sup>2</sup>
Format		Wall mounting box
Mounting		Wall mounting by screws (not supplied)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit - transmission cut-off - fault mode 2
Spare module(s)		S480-24D3
Remote signaling of disconnection		No
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Certification		UL 497B
Environmental standards		EU RoHS
Part number		
<b>72793</b>		

