
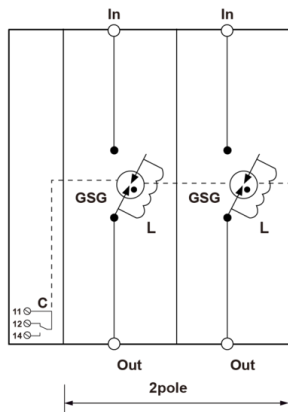


- SPD Specific Disconnectors (SSD) for short circuit protection of Type 1 AC surge protectors
- Surge current withstand: 12.5 kA @ 10/350µs
- Wide range of short circuit current protected
- Reusable after switch triggered
- Low rated tripping current with time-current characteristics for overcurrent coordination with upstream OCPD and safety disconnect in case of SPD failure



ELEKTRISCHE EIGENSCHAFTEN		
Nennableitstoßstrom (8/20) µs / Pol 15 Impulse mit In (8/20) µs	In	60 kA
Blitzstoßstrom (10/350) µs / Pol max . Blitzableitfähigkeit pro Pol (10/350) µs	Iimp	15 kA
Vorsicherung integriert		125 A
Ausschaltvermögen		100 000 A
Restspannung	Up	< 1.9 kV
Bemessungsisolationsspannung	Ui	400 Vac
MECHANISCHE EIGENSCHAFTEN		
Bauart		Monoblock-Gehäuse für Hutschienenmontage
Montage auf		35 mm Hutschiene
Temperaturbereich	Tu	-40/+85°C
Schutzart		IP20
Fernmeldesignalisierung (FS)		Potentialfreier Wechsler
Einbaumaße		Siehe Maßbild
NORMEN		
Normkonform nach		GB/T 18802.11 / IEC 61643-11 / NB/T 42150
Artikel Nummer		
803112		