




CITEL

ZPAC1-8VG-PRO-U-TNC



- ▶ Type 1+2+3 combined SPD based on a gas-filled spark gap
- ▶ 10-year guarantee
- ▶ Discharge capacity per pole: $I_{imp} = 8 \text{ kA}$ (10/350 μs)
- ▶ Operating and leakage current-free
- ▶ Individually pluggable protection modules: sustainable solution, cost-effective maintenance
- ▶ Complies with the IEC 61643-11 and EN 61643-11 standards
- ▶ VDE-AR-N 4100 compliant "Use of surge protective devices (SPD) type 1 in main power supply systems"
- ▶ Dual voltage tap for RFZ and APZ (incl. fuse)

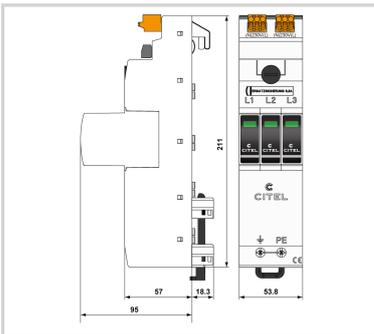

| Electrical Characteristics | | |
|--|--------------------|--|
| SPD type | IEC | 1+2+3 |
| Network | | 230/400 V 3-phase |
| AC system | | TNC |
| Nominal line voltage | Un | 230/400 Vac |
| Max. AC operating voltage | Uc | 275 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection | UT | 335 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection | UT | 440 Vac withstand |
| Residual Current Leakage current to Ground | Ipe | None |
| Follow current | If | None |
| Nominal discharge current 15 x 8/20 μs impulses | In | 20 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | I _{max} | 50 kA |
| Impulse current by pole max. withstand 10/350 μs by pole | I _{imp} | 8 kA |
| Total lightning current max. total withstand @ 10/350 μs | I _{total} | 24 kA |
| Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 μs - 8/20 μs | Uoc | 6 kV |
| Specific energy by pole max. withstand 10/350 μs | W/R | 16 kJ/ohm |
| Protection mode(s) | | L/PE |
| Protection level L/PE @ In (8/20 μs) | Up L/PE | 1.5 kV |
| Residual voltage L/PE at 5 kA @ 5 kA (8/20 μs) | Up-5kA | 0.9 kV |
| Admissible short-circuit current | I _{scrr} | 50 000 A |
| Mechanical Characteristics | | |
| Technology | | VG Technology (MOV+GSG) |
| SPD configuration | | 3-phase |
| Connection to Network | | By 40mm busbar and wire for PE: 6-35mm ² (50mm ²) |
| Format | | Plug-in modular box |
| Mounting | | 40 mm busbar systems |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 1 mechanical indicator by pole |
| Spare module(s) | | MDAC1-8VG-275 |
| Remote signaling of disconnection | | none |
| Dimensions | | See diagram |
| Disconnectors | | |



CITEL

Type 1+2+3 AC surge protector - 3-phase

ZPAC1-8VG-PRO-U-TNC

| | | |
|-----------------------------------|--|--|
| Thermal disconnecter | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | max. 315 A (gL/gG) |
| Standards | | |
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 5ed. |
| Certification | | KEMA |
| Part number | | |
| 64218 | | |

