





# CITEL

## PV-DC-Junction box

### FWS3.K2x10.K2x10



- Fire department switch for 3 MPP trackers / 2 strings
- Integrated surge protection (PV DC type 1+2 / AC type 2+3)
- Protection class IP65
- Connection via spring-loaded terminals
- Manual shutdown via emergency switch
- Automatic shutdown in the event of a power failure
- Automatic restart when power is restored
- Remote signaling (SPD only)

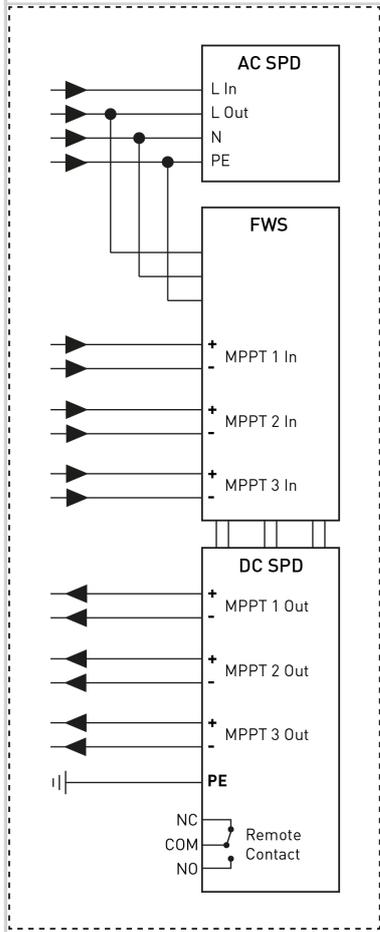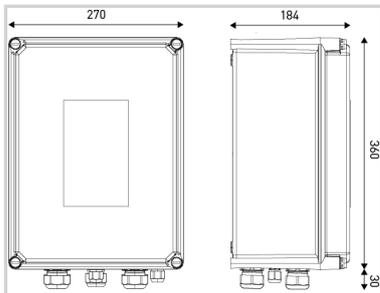

Electrical Characteristics		
SPD type	IEC	PV-DC Type 1+2 and AC Type 2+3
Network		PV network 1000 Vdc
Nominal DC voltage	Un-dc	1000 Vdc
Nominal discharge current <i>15 x 8/20 μs impulses</i>	In	20 kA
Impulse current by pole <i>max. withstand 10/350μs by pole</i>	Iimp	5 kA
Total lightning current <i>max. total withstand @ 10/350μs</i>	Itotal	10 kA
Current withstand short circuit PV	Iscpv	15 000 A
Rated insulation voltage <i>Ui</i>	Ui	1500 Vdc
Rated current <i>InA</i>	InA	3x 2x 20 A
Rated string current	InC	3x 50 A
Control voltage (switch)		100 Vac - 270 Vac 50/60Hz
Mechanical Characteristics		
Remote signaling of disconnection		Output on changeover contact
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Input / per MPPT		Spring terminals / 2x 6-10 mm <sup>2</sup>
Output / per MPPT		Spring terminal / 2x 6-10mm <sup>2</sup>
Ground connection terminal		Screw terminal max. 16mm <sup>2</sup>
Cable gland		M32 with MDI (Ø 6mm)
Housing material		UV and ozone resistant, fiberglass reinforced polycarbonate with semi-transparent cover
Dimensions		WxHxD (mm): 360 x 270 x 184
Ambient temperatures		-20°C to +40°C
Humidity		95% (non-condensing)
Protection rating		IP 65
Protection class		Class II
Impact resistance		IK 10
Pressure compensation element		Existing
Standards		
Standards compliance		EN 61439-1 / EN 61439-2 / IEC 60364-7-712:2017-04
Part number		
<b>157350</b>		

