





# CITEL

## Type 1+2+3 AC surge protector - 3-phase+N

### DS134VGS-120

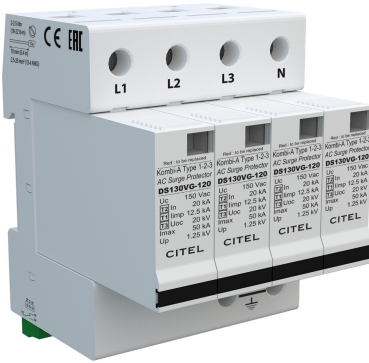

- ▶ Discover our latest innovation : the [DAC1-13VGS-40-150](#)
- ▶ Type 1 + 2 + 3 AC surge protector
- ▶ In : 20 kA
- ▶ Iimp total : 50 kA on 10/350µs impulse
- ▶ Pluggable module
- ▶ Optimized to TOV
- ▶ Remote signaling
- ▶ EN 61643-11, IEC 61643-11 and UL1449 ed.5 compliance

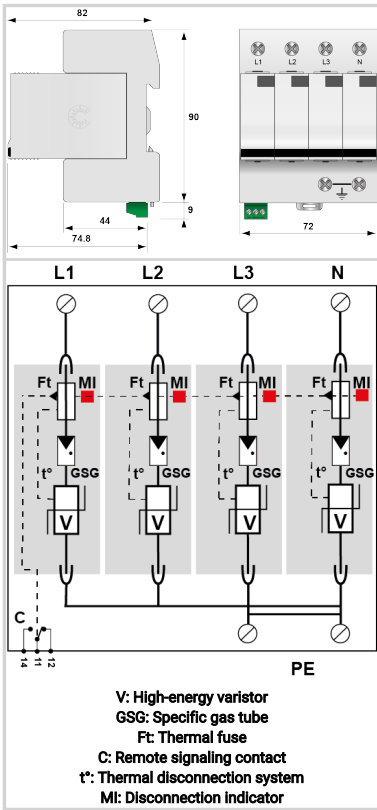

#### Electrical Characteristics

|                                                                                                             |                    |                     |
|-------------------------------------------------------------------------------------------------------------|--------------------|---------------------|
| SPD type                                                                                                    | IEC                | 1+2+3               |
| Network                                                                                                     |                    | 120/208 V 3-phase+N |
| AC system                                                                                                   |                    | TNS                 |
| Nominal line voltage                                                                                        | Un                 | 120 Vac             |
| Max. AC operating voltage                                                                                   | Uc                 | 150 Vac             |
| Temporary Over Voltage (TOV) Characteristics - 5 sec.<br>Without disconnection                              | UT                 | 180 Vac withstand   |
| Temporary Over Voltage (TOV) Characteristics - 120 mn<br>Without disconnection or with safety disconnection | UT                 | 230 Vac withstand   |
| Residual Current<br>Leakage current to Ground                                                               | Ipe                | None                |
| Follow current                                                                                              | If                 | None                |
| Nominal discharge current<br>15 x 8/20 µs impulses                                                          | In                 | 20 kA               |
| Max. discharge current<br>max. withstand @ 8/20 µs by pole                                                  | I <sub>max</sub>   | 50 kA               |
| Impulse current by pole<br>max. withstand 10/350µs by pole                                                  | I <sub>imp</sub>   | 12.5 kA             |
| Total lightning current<br>max. total withstand @ 10/350µs                                                  | I <sub>total</sub> | 50 kA               |
| Withstand on Combination waveform IEC 61643-11<br>Class III test: 1.2/50µs - 8/20µs                         | Uoc                | 20 kV               |
| Withstand on overvoltages IEEE C62.41.1                                                                     |                    | 20 kV               |
| Specific energy by pole<br>max. withstand 10/350 µs                                                         | W/R                | 40 kJ/ohm           |
| Connection mode(s)                                                                                          |                    | L/PE and N/PE       |
| Protection mode(s)                                                                                          |                    | Common mode         |
| Residual voltage<br>@ In (8/20 µs)                                                                          | Up-in              | 0.4 kV              |
| Protection level N/PE<br>@ In (8/20µs)                                                                      | Up N/PE            | 1.25 kV             |
| Protection level L/PE<br>@ In (8/20µs)                                                                      | Up L/PE            | 1.25 kV             |
| Admissible short-circuit current                                                                            | I <sub>sc</sub>    | 25 000 A            |

#### Mechanical Characteristics

|                                   |    |                                                    |
|-----------------------------------|----|----------------------------------------------------|
| Technology                        |    | VG Technology (MOV+GSG)                            |
| SPD configuration                 |    | 3-phase+Neutral                                    |
| Connection to Network             |    | By screw terminals: 2.5-25mm <sup>2</sup> / by bus |
| Format                            |    | Plug-in modular box                                |
| Mounting                          |    | Symmetrical rail 35 mm (EN 60715)                  |
| Housing material                  |    | Thermoplastic UL94 V-0                             |
| Operating temperature             | Tu | -40/+85°C                                          |
| Protection rating                 |    | IP20                                               |
| Failsafe mode                     |    | Disconnection from AC network                      |
| Disconnection indicator           |    | 1 mechanical indicator by pole                     |
| Spare module(s)                   |    | DSM130VG-120                                       |
| Remote signaling of disconnection |    | Output on changeover contact                       |
| Dimensions                        |    | See diagram                                        |

#### Disconnectors

|                                   |  |                       |
|-----------------------------------|--|-----------------------|
| Thermal disconnector              |  | Internal              |
| Installation ground fault breaker |  | Type 'S' or delayed   |
| Back-up protection device         |  | Fuses Type gG - 125 A |

#### Standards

|                      |  |                                          |
|----------------------|--|------------------------------------------|
| Standards compliance |  | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
|----------------------|--|------------------------------------------|

#### Part number

571674

