



DS42S-120/G

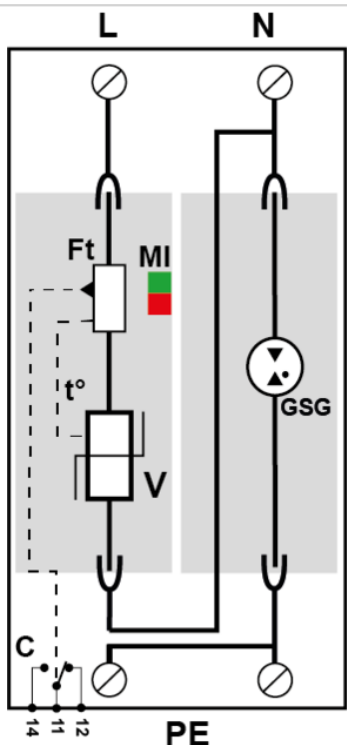

- ✦ Discover our latest innovation : the [DAC50S-11-150](#)
- ✦ Type 2 AC Multipolar surge protector
- ✦ In : 20 kA
- ✦ I_{max} total : 40 kA
- ✦ Pluggable module for each phase
- ✦ Remote signaling
- ✦ NF EN 61643-11, IEC 61643-11 compliance
- ✦ UL1449 ed.5



V: High-energy varistor
GSG: Specific gas tube
Ft: Thermal fuse
C: Remote signaling contact
t°: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics		
SPD type	IEC	2
Network		120 V single-phase
AC system		TT-TN
Nominal line voltage	U _n	120 Vac
Max. AC operating voltage	U _c	150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	230 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms withstand
Residual Current	I _{pe}	None
Leakage current to Ground	I _f	None
Nominal discharge current 15 x 8/20 µs impulses	I _n	20 kA
Max. discharge current max. withstand @ 8/20 µs by pole	I _{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 µs	I _{max} Total	40 kA
Connection mode(s)		L/N and N/PE
Protection mode(s)		Common/Differential mode
Residual voltage at 5 kA @ 5 kA (8/20µs)	Up-5kA	0.6 kV
Protection level L/N @ I _n (8/20µs)	Up L/N	0.9 kV
Protection level N/PE @ I _n (8/20µs)	Up N/PE	1.5 kV
Admissible short-circuit current	I _{sc}	25 000 A
Mechanical Characteristics		
Technology		MOV+GDT
SPD configuration		Single phase
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole
Spare module(s)		DSM40-120/DSM40G-600
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		0.175 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 50 A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		CSA / UL Listed
Part number		
461631		