




CITEL

2-pair DIN rail plug-in Telecom surge protector for telecom/data

DLA2-170

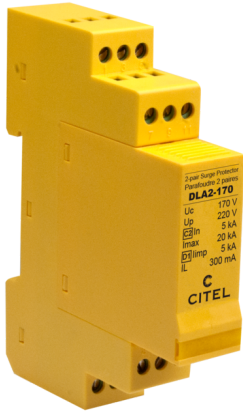

- ✦ Din rail plug-in surge protector
- ✦ 2-pair
- ✦ Uc: 170 V
- ✦ Shield wire protection
- ✦ Without line cut-off
- ✦ IEC 61643-21 compliance
- ✦ UL497B



	Electrical Characteristics																																								
<p>G: 3-electrode gas tube Gb: 2-electrode gas tube R: Resistor D: Clamping diode</p>	<table border="1"> <tr> <td>Network</td> <td></td> <td>Telephone line, ADSL2, SHDSL, VDSL2</td> </tr> <tr> <td>Nominal line voltage</td> <td>Un</td> <td>150 V</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc</td> <td>170 Vdc</td> </tr> <tr> <td>Max. frequency</td> <td>f max.</td> <td>> 10 MHz</td> </tr> <tr> <td>Max. load current @25°C</td> <td>IL</td> <td>300 mA</td> </tr> <tr> <td>Max. discharge current max. withstand @ 8/20 µs by pole</td> <td>Imax</td> <td>20 kA</td> </tr> <tr> <td>Line inductance (± 10 %)</td> <td></td> <td>non</td> </tr> <tr> <td>Protection Level C3 (10/1000µs), 300 applications@10 A, X-X (Line/Line)</td> <td>Up</td> <td>220 V</td> </tr> <tr> <td>Protection level C3 (10/1000µs), 300 applications@10 A, X-C (Line/Earth)</td> <td>Up</td> <td>20 V</td> </tr> <tr> <td>Impulse current 2 x 10/350µs Test - D1 Category</td> <td>limp</td> <td>5 kA</td> </tr> <tr> <td>Nominal discharge current C2 Category</td> <td>In</td> <td>5 kA</td> </tr> <tr> <td>Line resistance (± 10%)</td> <td></td> <td>4.7 Ohm</td> </tr> </table>		Network		Telephone line, ADSL2, SHDSL, VDSL2	Nominal line voltage	Un	150 V	Max. DC operating voltage	Uc	170 Vdc	Max. frequency	f max.	> 10 MHz	Max. load current @25°C	IL	300 mA	Max. discharge current max. withstand @ 8/20 µs by pole	Imax	20 kA	Line inductance (± 10 %)		non	Protection Level C3 (10/1000µs), 300 applications@10 A, X-X (Line/Line)	Up	220 V	Protection level C3 (10/1000µs), 300 applications@10 A, X-C (Line/Earth)	Up	20 V	Impulse current 2 x 10/350µs Test - D1 Category	limp	5 kA	Nominal discharge current C2 Category	In	5 kA	Line resistance (± 10%)		4.7 Ohm			
Network		Telephone line, ADSL2, SHDSL, VDSL2																																							
Nominal line voltage	Un	150 V																																							
Max. DC operating voltage	Uc	170 Vdc																																							
Max. frequency	f max.	> 10 MHz																																							
Max. load current @25°C	IL	300 mA																																							
Max. discharge current max. withstand @ 8/20 µs by pole	Imax	20 kA																																							
Line inductance (± 10 %)		non																																							
Protection Level C3 (10/1000µs), 300 applications@10 A, X-X (Line/Line)	Up	220 V																																							
Protection level C3 (10/1000µs), 300 applications@10 A, X-C (Line/Earth)	Up	20 V																																							
Impulse current 2 x 10/350µs Test - D1 Category	limp	5 kA																																							
Nominal discharge current C2 Category	In	5 kA																																							
Line resistance (± 10%)		4.7 Ohm																																							
	Mechanical Characteristics																																								
	<table border="1"> <tr> <td>Technology</td> <td></td> <td>GDT+TVS diode</td> </tr> <tr> <td>SPD configuration</td> <td></td> <td>2-pairs+shielded</td> </tr> <tr> <td>Connection to Network</td> <td></td> <td>By screw terminal: cross section 0.5-2.5mm²</td> </tr> <tr> <td>Format</td> <td></td> <td>Plug-in DIN box</td> </tr> <tr> <td>Mounting</td> <td></td> <td>Symmetrical rail 35 mm (EN 60715)</td> </tr> <tr> <td>Housing material</td> <td></td> <td>Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating and storage temperature</td> <td></td> <td>-40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td></td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td></td> <td>Short-circuit</td> </tr> <tr> <td>Disconnection indicator</td> <td></td> <td>Transmission interrupt - default mode 2</td> </tr> <tr> <td>Spare module(s)</td> <td></td> <td>DLA2M-170</td> </tr> <tr> <td>Dimensions</td> <td></td> <td>See diagram</td> </tr> <tr> <td>Weight</td> <td></td> <td>0.089 kg</td> </tr> </table>		Technology		GDT+TVS diode	SPD configuration		2-pairs+shielded	Connection to Network		By screw terminal: cross section 0.5-2.5mm ²	Format		Plug-in DIN box	Mounting		Symmetrical rail 35 mm (EN 60715)	Housing material		Thermoplastic UL94 V-0	Operating and storage temperature		-40/+85°C	Protection rating		IP20	Failsafe mode		Short-circuit	Disconnection indicator		Transmission interrupt - default mode 2	Spare module(s)		DLA2M-170	Dimensions		See diagram	Weight		0.089 kg
Technology		GDT+TVS diode																																							
SPD configuration		2-pairs+shielded																																							
Connection to Network		By screw terminal: cross section 0.5-2.5mm ²																																							
Format		Plug-in DIN box																																							
Mounting		Symmetrical rail 35 mm (EN 60715)																																							
Housing material		Thermoplastic UL94 V-0																																							
Operating and storage temperature		-40/+85°C																																							
Protection rating		IP20																																							
Failsafe mode		Short-circuit																																							
Disconnection indicator		Transmission interrupt - default mode 2																																							
Spare module(s)		DLA2M-170																																							
Dimensions		See diagram																																							
Weight		0.089 kg																																							
	Standards																																								
	<table border="1"> <tr> <td>Standards compliance</td> <td></td> <td>IEC 61643-21 / EN 61643-21 / UL497B</td> </tr> <tr> <td>Certification</td> <td></td> <td>UL Listed</td> </tr> </table>		Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B	Certification		UL Listed																																	
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B																																							
Certification		UL Listed																																							
	Part number																																								
	<table border="1"> <tr> <td>640611</td> </tr> </table>		640611																																						
640611																																									

