

AK1.K5x35.K5x35.13VGS-31-275



- Universal small housing for individual cable entry with consideration of practical cross-sections
- Internal terminal design allows spur or V-wiring (series)
- Suitable for TN-TT mains types
- Integrated DAC13VGS-31-275
- Type 1+2+3 combined arrester based on a gas-filled spark gap
- Discharge capacity per pole: Iimp= 12,5 kA (10/350µs); Imax= 50kA (8/20µs)
- Pluggable protection modules
- Remote signalling as standard
- Can be used for lightning protection classes III + IV
- VDE-AR-N 4100 compliant "Use of surge protective devices (SPD) type 1 in main power supply systems"

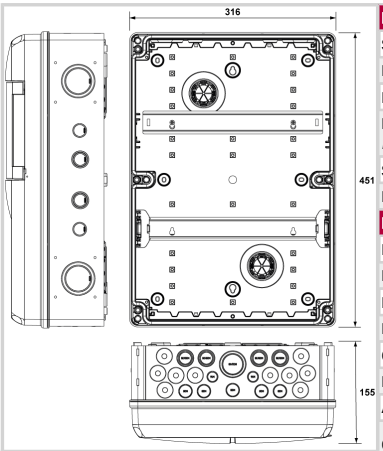

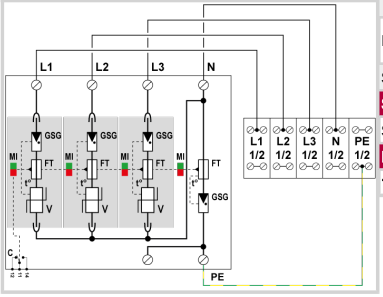

Electrical Characteristics		
SPD type	IEC	1+2+3
Nominal line voltage	Un	230/400 Vac
Max. AC operating voltage	Uc	275 Vac
Max. load current *if series connection*	IL	bis 119 A (Verlegeart beachten)
Surge protection device		DAC1-13VGS-31-275 (internally pre-wired)
Nominal frequency	fn	0-100 Hz
Mechanical Characteristics		
Housing material		Thermoplastic UL94 V-0
Protection rating		IP65
Dimensions		See diagram - 3 TE (EN43880)
Entrance		Screw terminals max. 35mm² (rm)
Outgoing		Screw terminals max. 35mm² (rm)
Earth connection terminal		Screw terminal max. 35mm² (rm)
Ambient temperature		-25°C bis +40°C / 24h up to max. 35°C
Cable gland		Double diaphragm connector Cable glands M20 / M25 / M32 / M40 / M50
Humidity		Relative humidity (25°C) 5% to 95% / Max. relative air humidity (40°C) 50%.
Shock resistance		IK 08
Standards		
Standards compliance		IEC 61643-11
Part number		
159141		