
LMS-W-HL



- Smart lightning monitoring system for wind turbines.
- 1 monitor + 3 sensors for the blades
- Monitoring, record the data for surge current, time of lightning strike, etc.
- Transmit the data by means of RS485.
- IEC 61400-24 and IEC 62561-6 compliant

CE

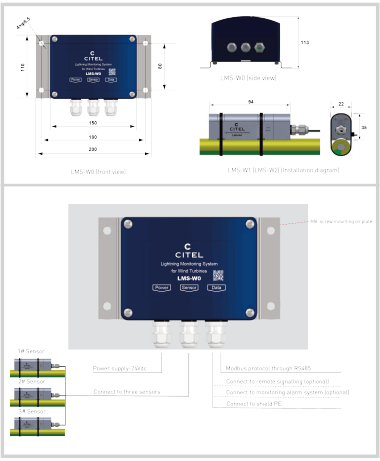

Electrical Characteristics		
Power dissipation		3W
Minimum current sensibility	Itc	20 kA
Max. admissible impulse current	Imcw	250 kA
Life time		10 years
Mechanical Characteristics		
Mounting		On plate
Operating temperature	Tu	-40°C bis + 70°C
Protection rating		IP67
Dimensions		66 x 55 x 47 mm
Standards		
Standards compliance		IEC 61400-24, IEC 62561-6
Part number		
7906235		