

Shielded power and signal cable dedicated to OBSTA medium intensity and high intensity lights with

CABLE-5G2.5-SO-3X0.75

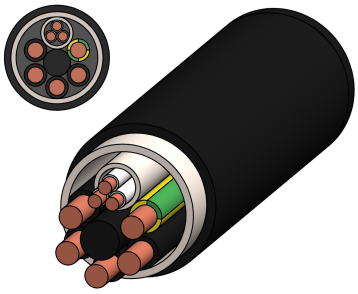

CABLE 3 x 0.75 mm² SCREENED + 5 G 2.5 mm² OVERALL SCREENED 0.75mm²: white with black numbers from 1 to 3 2.5mm²: black with white numbers from 1 to 4 + yellow/green

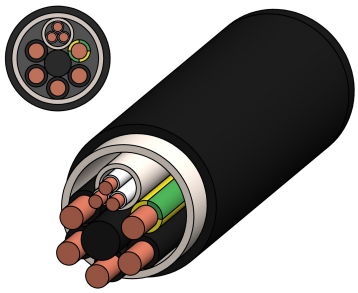

MECHANISCHE EIGENSCHAFTEN		
Static bending radius		100mm
Cable diameter		16.3mm
Temperaturbereich	Tu	-40/+80°C
Farbe		Black
Artikel Nummer		
127126		