



E280-48DBC

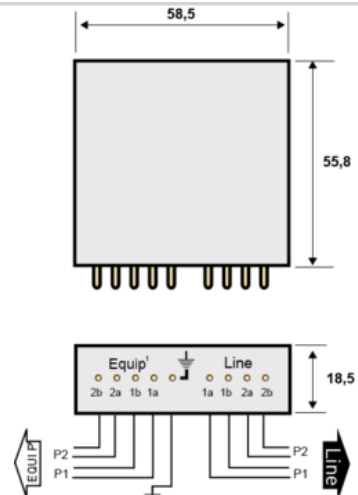

- ↳ 2-pair plug-in module
- ↳ Optimized modularity and maintenance
- ↳ Can be adapted to all types of line
- ↳ Gas tube /diode combination
- ↳ UL497A

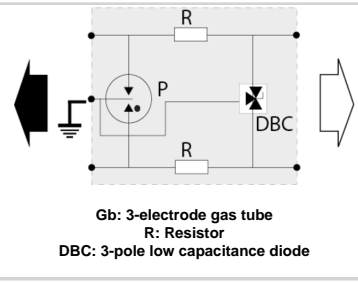

	<table border="1"> <thead> <tr> <th colspan="2">Electrical Characteristics</th> </tr> </thead> <tbody> <tr> <td>Network</td> <td>RNIS-TO, 48 V line</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc 53 V</td> </tr> <tr> <td>Max. frequency</td> <td>f max. > 20 MHz</td> </tr> <tr> <td>Insertion loss</td> <td>< 1 dB</td> </tr> <tr> <td>Max. load current</td> <td>IL 300 mA</td> </tr> <tr> <td>Max. discharge current (max. withstand @ 8/20 µs by pole)</td> <td>Imax 10 kA</td> </tr> <tr> <td>Total Maximum discharge current (max. total withstand @ 8 /20 µs)</td> <td>Imax Total 20 kA</td> </tr> <tr> <td>Line inductance</td> <td>No</td> </tr> <tr> <td>Protection mode(s)</td> <td>Common/Differential mode</td> </tr> <tr> <td>Protection level(Following the test category C3 (IEC61643-21) - Line/Line)</td> <td>Up 75 V</td> </tr> <tr> <td>Max. capacitance</td> <td>C < 25 pF</td> </tr> <tr> <td>Impulse current(2 x 10/350µs Test - D1 Category)</td> <td>Iimp 2.5 kA</td> </tr> <tr> <td>Nominal discharge current(8/20µs Test x 10 - C2 Category)</td> <td>In 5 kA</td> </tr> <tr> <td>Type of diagram</td> <td>C</td> </tr> <tr> <th colspan="2">Mechanical Characteristics</th> </tr> <tr> <td>Technology</td> <td>GDT+Clamping diode</td> </tr> <tr> <td>SPD configuration</td> <td>2 pairs</td> </tr> <tr> <td>Format</td> <td>plug-in modul on support</td> </tr> <tr> <td>Mounting</td> <td>on support type BN, FPSU, MMP</td> </tr> <tr> <td>Housing material</td> <td>Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating temperature</td> <td>Tu -40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td>Short-circuit - transmision cut-off - fault mode 2</td> </tr> <tr> <td>Disconnection indicator</td> <td>Transmission interrupt</td> </tr> <tr> <td>Remote signaling of disconnection</td> <td>No</td> </tr> <tr> <td>Dimensions</td> <td>See diagram</td> </tr> <tr> <th colspan="2">Standards</th> </tr> <tr> <td>Standards compliance</td> <td>IEC 61643-21 / EN 61643-21 / UL497A</td> </tr> <tr> <td>Certification</td> <td>UL listed</td> </tr> <tr> <th colspan="2">Part number</th> </tr> <tr> <td colspan="2">71174</td> </tr> </tbody> </table>	Electrical Characteristics		Network	RNIS-TO, 48 V line	Max. DC operating voltage	Uc 53 V	Max. frequency	f max. > 20 MHz	Insertion loss	< 1 dB	Max. load current	IL 300 mA	Max. discharge current (max. withstand @ 8/20 µs by pole)	Imax 10 kA	Total Maximum discharge current (max. total withstand @ 8 /20 µs)	Imax Total 20 kA	Line inductance	No	Protection mode(s)	Common/Differential mode	Protection level(Following the test category C3 (IEC61643-21) - Line/Line)	Up 75 V	Max. capacitance	C < 25 pF	Impulse current(2 x 10/350µs Test - D1 Category)	Iimp 2.5 kA	Nominal discharge current(8/20µs Test x 10 - C2 Category)	In 5 kA	Type of diagram	C	Mechanical Characteristics		Technology	GDT+Clamping diode	SPD configuration	2 pairs	Format	plug-in modul on support	Mounting	on support type BN, FPSU, MMP	Housing material	Thermoplastic UL94 V-0	Operating temperature	Tu -40/+85°C	Protection rating	IP20	Failsafe mode	Short-circuit - transmision cut-off - fault mode 2	Disconnection indicator	Transmission interrupt	Remote signaling of disconnection	No	Dimensions	See diagram	Standards		Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A	Certification	UL listed	Part number		71174	
Electrical Characteristics																																																																	
Network	RNIS-TO, 48 V line																																																																
Max. DC operating voltage	Uc 53 V																																																																
Max. frequency	f max. > 20 MHz																																																																
Insertion loss	< 1 dB																																																																
Max. load current	IL 300 mA																																																																
Max. discharge current (max. withstand @ 8/20 µs by pole)	Imax 10 kA																																																																
Total Maximum discharge current (max. total withstand @ 8 /20 µs)	Imax Total 20 kA																																																																
Line inductance	No																																																																
Protection mode(s)	Common/Differential mode																																																																
Protection level(Following the test category C3 (IEC61643-21) - Line/Line)	Up 75 V																																																																
Max. capacitance	C < 25 pF																																																																
Impulse current(2 x 10/350µs Test - D1 Category)	Iimp 2.5 kA																																																																
Nominal discharge current(8/20µs Test x 10 - C2 Category)	In 5 kA																																																																
Type of diagram	C																																																																
Mechanical Characteristics																																																																	
Technology	GDT+Clamping diode																																																																
SPD configuration	2 pairs																																																																
Format	plug-in modul on support																																																																
Mounting	on support type BN, FPSU, MMP																																																																
Housing material	Thermoplastic UL94 V-0																																																																
Operating temperature	Tu -40/+85°C																																																																
Protection rating	IP20																																																																
Failsafe mode	Short-circuit - transmision cut-off - fault mode 2																																																																
Disconnection indicator	Transmission interrupt																																																																
Remote signaling of disconnection	No																																																																
Dimensions	See diagram																																																																
Standards																																																																	
Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A																																																																
Certification	UL listed																																																																
Part number																																																																	
71174																																																																	
 <p> Gb: 3-electrode gas tube R: Resistor DBC: 3-pole low capacitance diode </p>																																																																	