






Type 1+2 PV surge protector

CITEL

DS50PVS-1000G/12KT1

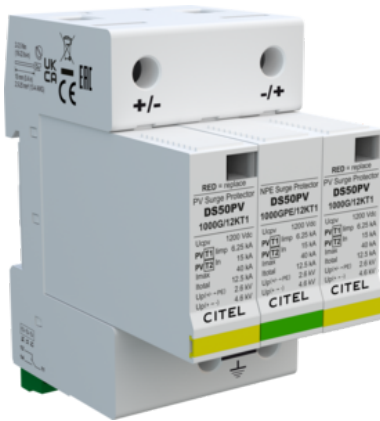

- ▶ Type 1+2 surge protector for Photovoltaic
- ▶ Impulse currents I_{imp}/I_{total} : 6.25/12.5 kA (10/350 μ s)
- ▶ Common/Differential mode protection
- ▶ Remote signaling
- ▶ IEC 61643-31, EN 61643-31, EN 50539-11 and UL1449 ed.5 compliance



V: High-energy varistor
 GSG: Specific gas tube
 Ft: Thermal fuse
 C: Remote signaling contact
 t*: Thermal disconnection system
 MI: Disconnection indicator

Electrical Characteristics		
SPD type		1+2
Network		PV network 1000 Vdc
Nominal PV voltage	Uocstc	1000 Vdc
Max. PV operating voltage	Ucpv	1200 Vdc
Residual Current Leakage current to Ground	Ipe	None
PV Permanent Operating Current consumption at Ucpv	Icpv	< 0.1 mA
Follow current	If	None
Nominal discharge current 15 x 8/20 μ s impulses	In	15 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	I _{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	I _{max} Total	60 kA
Impulse current by pole max. withstand 10/350 μ s by pole	I _{imp}	6.25 kA
Total lightning current max. total withstand @ 10/350 μ s	I _{total}	12.5 kA
Current withstand short circuit PV	I _{scpv}	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level +/- @ In (8/20 μ s)	U _p	4.6 kV
Protection level +/-PE (-/PE) @ In (8/20 μ s)	U _p	2.6 kV
Mechanical Characteristics		
Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5-25mm ²
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-2
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM50PV-1000G/12KT1
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		0.396 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Without
Standards		
Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification		TUV
Part number		
482393		

