



Type 1+2 AC surge protector

CITEL

DS134RS-230



➤ Discover our latest innovation : the [DAC1-13S-40-275](#)

➤ Type 1 + 2 AC multipolar surge protector

➤ In : 20 kA

➤ Iimp total : 50 kA

➤ Pluggable module for each phase

➤ Remote signaling

➤ EN 61643-11, IEC 61643-11 compliance



Electrical Characteristics

SPD type	1+2
Network	230/400 V 3-phase+N
AC system	TNS
Nominal line voltage	Un 230 Vac
Max. AC operating voltage	Uc 255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT 440 Vac disconnection
Follow current	If None
Nominal discharge current <i>15 x 8/20 µs impulses</i>	In 20 kA
Max. discharge current <i>max. withstand @ 8/20 µs by pole</i>	Imax 50 kA
Impulse current by pole <i>max. withstand 10/350µs by pole</i>	Iimp 12.5 kA
Total lightning current <i>max. total withstand @ 10/350µs</i>	Itotal 50 kA
Withstand on overvoltages IEEE C62.41.1	20 kV
Specific energy by pole <i>max. withstand 10/350 µs</i>	W/R 40 kJ/ohm
Connection mode(s)	L/PE and N/PE
Protection mode(s)	Common mode
Protection level N/PE <i>@ In (8/20µs)</i>	Up N/PE 1.3 kV
Protection level L/PE <i>@ In (8/20µs)</i>	Up L/PE 1.3 kV
Admissible short-circuit current	Iscrr 25 000 A

Mechanical Characteristics

Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm² / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	DSM130R-230
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Weight	0.558 kg

Disconnectors



Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	Fuses Type gG - 125 A

Standards

Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	

Part number

571514

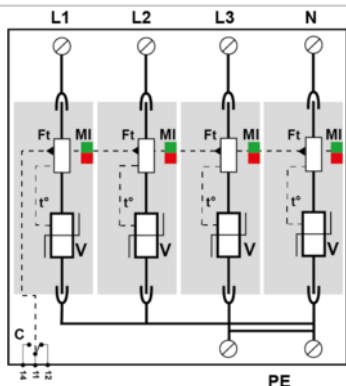

V: High-energy varistor
Ft: Thermal fuse
C: Remote signal contact
t*: Thermal disconnection system
MI: Disconnection indicator

