



BN08-V

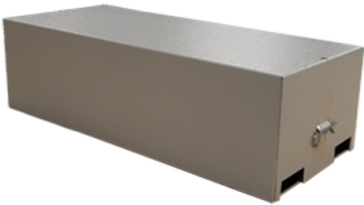

- Metal enclosures for E280
- Max. number of pairs : 8



	Electrical Characteristics		
	Network		Low current
	Max. frequency	f max.	> 20 MHz
	Insertion loss		< 1 dB
	Max. load current @25°C	IL	10 A
	Max. discharge current max. withstand @ 8/20 µs by pole	I _{max}	10 kA
	Impulse current 2 x 10/350µs Test - D1 Category	I _{imp}	2.5 kA
	Nominal discharge current C2 Category	I _n	5 kA
	Mechanical Characteristics		
	SPD configuration		8 pairs max
	Format		Metallic box
	Mounting		Wall
	Housing material		Metal
	Operating temperature	T _u	-40/+85°C
	Protection rating		IP20
	Connection		screw terminal - max. section 1,5 mm²
Part number			
71347			