




# Type 2 AC surge protector - 3-phase+N - Integrated fuses

# CITEL

## DACF25S-40-275



- ▶ Type 2 AC surge protector
- ▶ In: 15 kA
- ▶ I<sub>max</sub>: 25 kA
- ▶ Interne Disconnection device
- ▶ Pluggable module for each phase
- ▶ Remote signaling
- ▶ EN 61643-11, IEC 61643-11 certified
- ▶ UL1449 ed.5 compliance

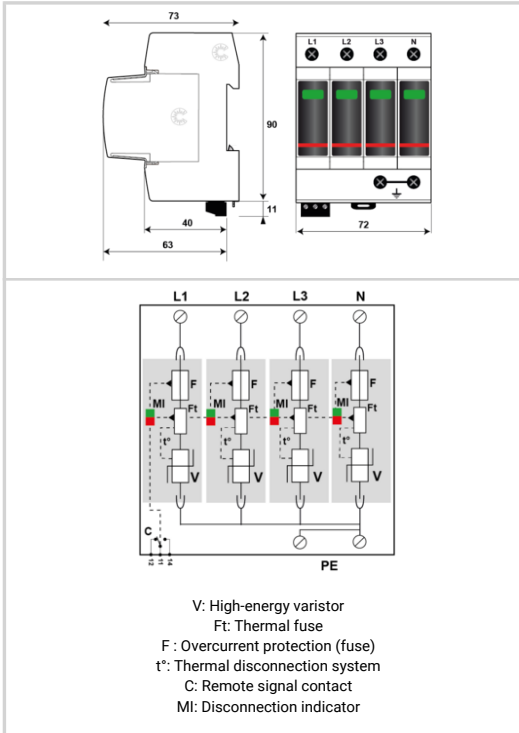

Electrical Characteristics	
SPD type	2
Network	230/400 V 3-phase+N
AC system	TNS
Max. AC operating voltage	U <sub>c</sub> 275 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Residual Current Leakage current to Ground	I <sub>pe</sub> < 1 mA
Follow current	I <sub>f</sub> None
Nominal discharge current 15 x 8/20 μs impulses	I <sub>n</sub> 15 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub> 25 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I <sub>max</sub> Total 100 kA
Connection mode(s)	L/PE and N/PE
Protection level N/PE @ I <sub>n</sub> (8/20μs)	U <sub>p</sub> N/PE 1.25 kV
Protection level L/PE @ I <sub>n</sub> (8/20μs)	U <sub>p</sub> L/PE 1.25 kV
Protection level N/PE at 5 kA @ 5 kA (8/20μs)	U <sub>p</sub> -5kA 1 kV
Residual voltage L/PE at 5 kA @ 5 kA (8/20μs)	U <sub>p</sub> -5kA 1 kV
Admissible short-circuit current	I <sub>sc</sub> 100 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm <sup>2</sup> (35mm <sup>2</sup> rigid)
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub> -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole - Red/Green
Spare module(s)	MDACF25-275
Remote signaling of disconnection	Output on changeover contact
Wiring for remote signaling	1.5 mm <sup>2</sup> max.
Max. Voltage/Current for remote signaling	250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions	See diagram - 4TE (EN43880)
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	internal (equivalent AC rating : 40 A, gG Type)
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	KEMA
Part number	
821410224	

