




# Surge protector for telephone line 1 to 4-pairs

# CITEL

## MJ8-170V

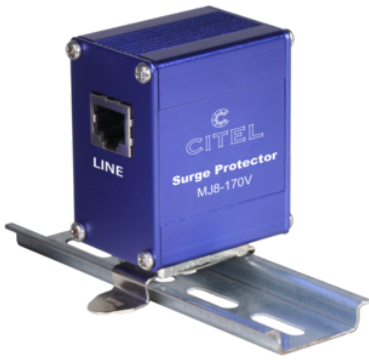

- ↳ Telecom line surge protector
- ↳ PSTN or ADSL line
- ↳ 4-pair
- ↳ Instantaneous installation
- ↳ RJ45 connector



	<b>Electrical Characteristics</b>																																								
<p>P: 3-electrode GDT D: Clamping diode</p>	<table border="1"> <tr> <td>Network</td> <td></td> <td>RTC, ADSL2, VDSL2 - 4 pairs</td> </tr> <tr> <td>Nominal line voltage</td> <td>Un</td> <td>150 Vdc</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc</td> <td>170 Vdc</td> </tr> <tr> <td>Max. frequency</td> <td>f max.</td> <td>&gt; 10 MHz</td> </tr> <tr> <td>Max. data rate</td> <td></td> <td>30 Mbps</td> </tr> <tr> <td>Insertion loss</td> <td></td> <td>&lt; 1 dB</td> </tr> <tr> <td>Max. load current @25°C</td> <td>IL</td> <td>1000 mA</td> </tr> <tr> <td>Protection level @ In (8/20 μs)</td> <td>Up L/L</td> <td>220 V</td> </tr> <tr> <td>Impulse current 2 x 10/350μs Test - D1 Category</td> <td>Iimp</td> <td>500 A</td> </tr> <tr> <td>Line/Line Nominal discharge current C2 Category</td> <td>In L/L</td> <td>500 A</td> </tr> <tr> <td>Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category</td> <td>In L/PE</td> <td>2000 A</td> </tr> </table>		Network		RTC, ADSL2, VDSL2 - 4 pairs	Nominal line voltage	Un	150 Vdc	Max. DC operating voltage	Uc	170 Vdc	Max. frequency	f max.	> 10 MHz	Max. data rate		30 Mbps	Insertion loss		< 1 dB	Max. load current @25°C	IL	1000 mA	Protection level @ In (8/20 μs)	Up L/L	220 V	Impulse current 2 x 10/350μs Test - D1 Category	Iimp	500 A	Line/Line Nominal discharge current C2 Category	In L/L	500 A	Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category	In L/PE	2000 A						
Network		RTC, ADSL2, VDSL2 - 4 pairs																																							
Nominal line voltage	Un	150 Vdc																																							
Max. DC operating voltage	Uc	170 Vdc																																							
Max. frequency	f max.	> 10 MHz																																							
Max. data rate		30 Mbps																																							
Insertion loss		< 1 dB																																							
Max. load current @25°C	IL	1000 mA																																							
Protection level @ In (8/20 μs)	Up L/L	220 V																																							
Impulse current 2 x 10/350μs Test - D1 Category	Iimp	500 A																																							
Line/Line Nominal discharge current C2 Category	In L/L	500 A																																							
Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category	In L/PE	2000 A																																							
<b>Mechanical Characteristics</b>																																									
<table border="1"> <tr> <td>Technology</td> <td></td> <td>GDT+Clamping diode</td> </tr> <tr> <td>SPD configuration</td> <td></td> <td>4 pairs+shielded</td> </tr> <tr> <td>Connection to Network</td> <td></td> <td>RJ45 connector Female input/output</td> </tr> <tr> <td>Format</td> <td></td> <td>Connector RJ45</td> </tr> <tr> <td>Mounting</td> <td></td> <td>Mounting flange,Screw lug, DIN Rail</td> </tr> <tr> <td>Accessory(s) provided</td> <td></td> <td>DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe</td> </tr> <tr> <td>Housing material</td> <td></td> <td>Aluminium</td> </tr> <tr> <td>Operating temperature</td> <td>Tu</td> <td>-40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td></td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td></td> <td>Short-circuit - transmission cut-off</td> </tr> <tr> <td>Pinout</td> <td></td> <td>4-pairs (1-2)(3-6)(4-5)(7-8)</td> </tr> <tr> <td>Dimensions</td> <td></td> <td>See diagram</td> </tr> <tr> <td>Weight</td> <td></td> <td>0.112 kg</td> </tr> </table>			Technology		GDT+Clamping diode	SPD configuration		4 pairs+shielded	Connection to Network		RJ45 connector Female input/output	Format		Connector RJ45	Mounting		Mounting flange,Screw lug, DIN Rail	Accessory(s) provided		DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe	Housing material		Aluminium	Operating temperature	Tu	-40/+85°C	Protection rating		IP20	Failsafe mode		Short-circuit - transmission cut-off	Pinout		4-pairs (1-2)(3-6)(4-5)(7-8)	Dimensions		See diagram	Weight		0.112 kg
Technology		GDT+Clamping diode																																							
SPD configuration		4 pairs+shielded																																							
Connection to Network		RJ45 connector Female input/output																																							
Format		Connector RJ45																																							
Mounting		Mounting flange,Screw lug, DIN Rail																																							
Accessory(s) provided		DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe																																							
Housing material		Aluminium																																							
Operating temperature	Tu	-40/+85°C																																							
Protection rating		IP20																																							
Failsafe mode		Short-circuit - transmission cut-off																																							
Pinout		4-pairs (1-2)(3-6)(4-5)(7-8)																																							
Dimensions		See diagram																																							
Weight		0.112 kg																																							
<b>Standards</b>																																									
Standards compliance IEC 61643-21 / EN 61643-21																																									
<b>Part number</b>																																									
560203																																									

