





Type 1+2 AC surge protector - 3-phase+N

CITEL

DAC1-13S-31-150



- Type 1 + 2 AC surge protector
- In : 20 kA
- Iimp : 12.5 kA
- Pluggable module for each phase
- Remote signaling
- EN 61643-11, IEC 61643-11 certified
- UL1449 ed.5 compliance

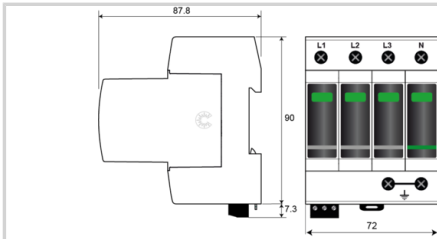

V: High-energy varistor
 GSG: Specific gas tube
 Ft: Thermal fuse
 C: Remote signaling contact
 t*: Thermal disconnection system
 MI: Disconnection indicator

Electrical Characteristics

| | | |
|--|------------------------|------------------------------|
| SPD type | | 1+2 |
| Network | | 120/208 V 3-phase+N |
| AC system | | TT-TNS |
| Max. AC operating voltage | Uc | 150 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection | UT | 180 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection | UT | 230 Vac disconnection |
| Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection | UT | 1200 V/300A/200 ms withstand |
| Residual Current | Ipe | None |
| Leakage current to Ground | | |
| Follow current | If | None |
| Nominal discharge current 15 x 8/20 μs impulses | In | 20 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | I _{max} | 50 kA |
| Total Maximum discharge current max. total withstand @ 8/20 μs | I _{max} Total | 150 kA |
| Impulse current by pole max. withstand 10/350 μs by pole | I _{imp} | 12.5 kA |
| Total lightning current max. total withstand @ 10/350 μs | I _{total} | 50 kA |
| Specific energy by pole max. withstand 10/350 μs | W/R | 40 kJ/ohm |
| Protection mode(s) | | L/N and N/PE |
| Protection level @ In (8/20 μs) and @ 6 kV (1,2/50 μs) | Up L/N | 0.9 kV |
| Protection level N/PE @ In (8/20 μs) and @ 6 kV (1,2/50 μs) | Up N/PE | 1.5 kV |
| Residual voltage L/N at 5 kA @ 5 kA (8/20 μs) | Up-5kA | 0.6 kV |
| Protection level N/PE at 5 kA @ 5 kA (8/20 μs) | Up-5kA | 0.6 kV |
| Admissible short-circuit current | I _{sc} | 50 000 A |

Mechanical Characteristics

| | | |
|---|----|---|
| Technology | | MOV |
| SPD configuration | | 3-phase+Neutral |
| Connection to Network | | By screw terminals: 2.5-25mm ² (35mm ² rigid) |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 1 mechanical indicator by pole - Red/Green |
| Spare module(s) | | MDAC1-13-150 |
| Remote signaling of disconnection | | Output on changeover contact |
| Wiring for remote signaling | | 1.5 mm ² max. |
| Max. Voltage/Current for remote signaling | | 250 V / 0.5 A (AC) / 30 V / 3 A (DC) |
| Dimensions | | See diagram - 4TE (EN43880) |
| Weight | | 0.461 kg |

Disconnectors

| | | |
|-----------------------------------|--|---|
| Thermal disconnector | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | Fuse assembly: SFD1-13S-31 / or 125 A min. - 315 A max. - Fuses Type gG |

Standards

| | | |
|----------------------|--|--|
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Certification | | KEMA |

Part number



CITEL

Type 1+2 AC surge protector - 3-phase+N

DAC1-13S-31-150

821710144

