


CXF60-N/MF



- Coaxial surge protector
- DC-500 MHz
- I<sub>max</sub>: 6 kA
- Bi-directional, series installed

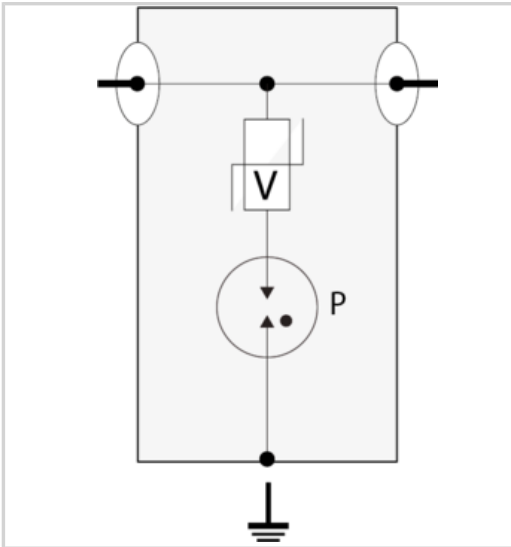

Electrical Characteristics		
Frequency range	f	DC-500 MHz
Insertion loss		< 0.2 dB
Return loss		> 19 dB
Impedance		50 ohms
VSWR		< 1.25:1
Max. load current	I <sub>L</sub>	6 A
Max. discharge current (max. withstand @ 8/20 μs by pole)	I <sub>max</sub>	6 kA
Protection mode(s)		Common mode
Protection level (@1kV/μs (C3) )	U <sub>p</sub>	< 800 V
Max Power		42 W
Mechanical Characteristics		
Connection to Network		connector N Male/Female
Operating temperature	T <sub>u</sub>	-50°C to +85°C
Protection rating		IP65
Weight		0.158 kg
Standards		
Certification		UL listed
RohS compliance		Yes
Part number		
<b>62004</b>		