


- ▶ POE++ compatible (IEEE 802.3bt)
- ▶ 10G compatible from 5m to 100m in the channel, using Cat-6A S/FTP cabling
- ▶ RJ45 Shielded connectors
- ▶ IEC 61643-21, EN 61643-21
- ▶ Indoor application: IP20 rating (NEMA 2)
- ▶ Plastic enclosure, UL94-V0
- ▶ Location and test categories: D1, C2, C3



Electrical Characteristics	
Network	10Gigabit Ethernet - Cat 6A cabling specification
Protection modes (network)	CM/DM
Protection modes (POE)	CM/DM
Transmission standard	IEEE 802.3bt
Lightning Protection Zones (LPZ)	0 - 3
Max. DC operating voltage	Uc 8 Vdc
Max. operating voltage (POE)	Uc 60 Vdc
Max. frequency	f max. 500 MHz
Max. data rate	10 Gbps
Max. load current @25°C	IL 2 A
Max. POE power (4PPOE)	90 W
Max. discharge current max. withstand @ 8/20 μs, X-C (Line/Earth)	I <sub>max</sub> 2 kA
Protection Level C3 category (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up 70 V
Protection level C3 category (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up 500 V
Protection Level C3 Category (10/1000μs), 300 applications @ 10A, (Pair-Pair, POE)	Up 80 V
Impulse current 2 x 10/350μs Test - D1 Category	I <sub>imp</sub> 400 A
Nominal discharge current C1 category (8/20μs), 300 applications X-X (Line/Line)	I <sub>n</sub> 1kV / 500A
Nominal discharge current C2 category (8/20μs), 10 applications X-C (Line/Earth)	I <sub>n</sub> 4 kV / 2 kA
Line resistance (± 10%)	0 Ohm
Capacitance @1MHz, X-C (Line/Earth)	C < 5 pF
Mechanical Characteristics	
Technology	GDT+Clamping diode
SPD configuration	4 pairs+shielded
Connection to Network	RJ45 shielded connectors Female input/output
Format	Metallic box with connectors input/output
Mounting	Mounting flange,Screw lug, DIN Rail
Accessory(s) provided	DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe
Housing material	Aluminium
Operating temperature	T <sub>u</sub> -40/+85°C
Ingress Protection rating	IP20 (NEMA 2)
Failsafe mode	Short-circuit
Disconnection indicator	Transmission interrupt - default mode 2
Pinout	(1-2)(3-6)(4-5)(7-8)
Dimensions	See diagram
Weight	0.106 kg
Standards	
Standards compliance	IEC 61643-21/ EN 61643-21 / UL497B IEEE 802-3af/3at/3bt/ ANSI/TIA-568-C.1
Certification	UL 497B
Part number	
<b>581541</b>	

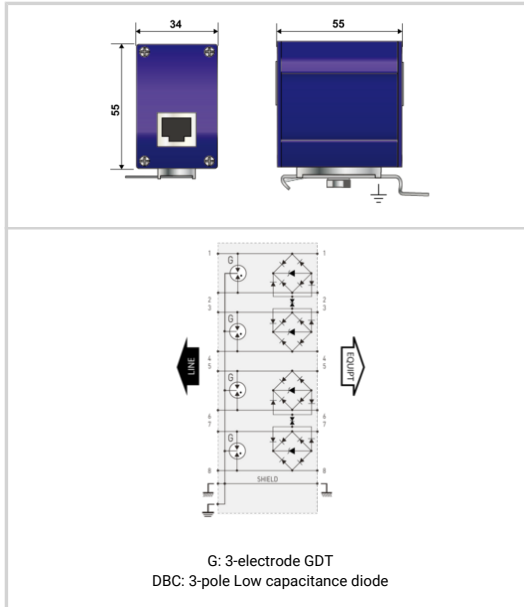