




Type 2 PV Surge Protector for PCB mounting

CITEL

PPV40GS-10-1200

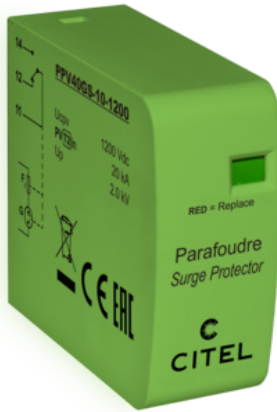

- Type 2 surge protector for Photovoltaic
- PCB mounting
- N/PE module
- I_{max}: 40 and 25 kA
- Application up to 1500 Vdc PV powerline
- Remote signaling
- EN 50539-11 and IEC 61643-31 compliance*



	Electrical Characteristics																																																			
	Mechanical Characteristics																																																			
<table border="1"> <tr><td>SPD type</td><td></td><td>2</td></tr> <tr><td>Max. PV operating voltage</td><td>U_{cpv}</td><td>1200 Vdc</td></tr> <tr><td>PV Permanent Operating current <i>Current consumption at U_{cpv}</i></td><td>I_{cpv}</td><td>None</td></tr> <tr><td>Nominal discharge current <i>15 x 8/20 μs impulses</i></td><td>I_n</td><td>20 kA</td></tr> <tr><td>Max. discharge current <i>max. withstand @ 8/20 μs by pole</i></td><td>I_{max}</td><td>40 kA</td></tr> <tr><td>Current withstand short circuit PV</td><td>I_{scpv}</td><td>15 000 A</td></tr> <tr><td>Protection level <i>@ I_n (8/20μs)</i></td><td>U_p</td><td>2.8 kV</td></tr> </table>	SPD type		2	Max. PV operating voltage	U _{cpv}	1200 Vdc	PV Permanent Operating current <i>Current consumption at U_{cpv}</i>	I _{cpv}	None	Nominal discharge current <i>15 x 8/20 μs impulses</i>	I _n	20 kA	Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	40 kA	Current withstand short circuit PV	I _{scpv}	15 000 A	Protection level <i>@ I_n (8/20μs)</i>	U _p	2.8 kV	<table border="1"> <tr><td>Technology</td><td></td><td>Gas discharge tube</td></tr> <tr><td>Connection to Network</td><td></td><td>Through soldering pins</td></tr> <tr><td>Mounting</td><td></td><td>On Printed Circuit Board</td></tr> <tr><td>Housing material</td><td></td><td>Thermoplastic UL94 V-0</td></tr> <tr><td>Operating temperature</td><td>T_u</td><td>-40/+85°C</td></tr> <tr><td>Protection rating</td><td></td><td>IP20</td></tr> <tr><td>Disconnection indicator</td><td></td><td>1 mechanical indicator</td></tr> <tr><td>Remote signaling of disconnection</td><td></td><td>Output on changeover contact</td></tr> <tr><td>Dimensions</td><td></td><td>See diagram</td></tr> <tr><td>Weight</td><td></td><td>0.026 kg</td></tr> </table>	Technology		Gas discharge tube	Connection to Network		Through soldering pins	Mounting		On Printed Circuit Board	Housing material		Thermoplastic UL94 V-0	Operating temperature	T _u	-40/+85°C	Protection rating		IP20	Disconnection indicator		1 mechanical indicator	Remote signaling of disconnection		Output on changeover contact	Dimensions		See diagram	Weight		0.026 kg
SPD type		2																																																		
Max. PV operating voltage	U _{cpv}	1200 Vdc																																																		
PV Permanent Operating current <i>Current consumption at U_{cpv}</i>	I _{cpv}	None																																																		
Nominal discharge current <i>15 x 8/20 μs impulses</i>	I _n	20 kA																																																		
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	40 kA																																																		
Current withstand short circuit PV	I _{scpv}	15 000 A																																																		
Protection level <i>@ I_n (8/20μs)</i>	U _p	2.8 kV																																																		
Technology		Gas discharge tube																																																		
Connection to Network		Through soldering pins																																																		
Mounting		On Printed Circuit Board																																																		
Housing material		Thermoplastic UL94 V-0																																																		
Operating temperature	T _u	-40/+85°C																																																		
Protection rating		IP20																																																		
Disconnection indicator		1 mechanical indicator																																																		
Remote signaling of disconnection		Output on changeover contact																																																		
Dimensions		See diagram																																																		
Weight		0.026 kg																																																		
Disconnectors	<table border="1"> <tr><td>Thermal disconnector</td><td></td><td>Internal</td></tr> <tr><td>Back-up protection device</td><td></td><td>Without</td></tr> </table>		Thermal disconnector		Internal	Back-up protection device		Without																																												
Thermal disconnector		Internal																																																		
Back-up protection device		Without																																																		
Standards																																																				
Standards compliance	IEC 61643-31 / EN 50539-11 *The standard cover devices. PPV /PAC series are components. Compliant when combined is an assembly.																																																			
Part number	8722608																																																			

