




# Type 1 AC Surge Protector for PCB mounting

# CITEL

## PAC1-6S-10-275



- Type 1+2 AC surge protector
- PCB mounting
- VG technology
- Iimp: 6,25 kV
- Remote signaling
- IEC 61643-31 and EN 61643-11 compliance\*



### Electrical Characteristics

SPD type		1+2
Max. AC operating voltage	Uc	275 Vac
Nominal discharge current <i>15 x 8/20 μs impulses</i>	In	20 kA
Impulse current by pole <i>max. withstand 10/350 μs by pole</i>	Iimp	6.25 kA
Protection level <i>@ In (8/20 μs)</i>	Up	1.2 kV
Admissible short-circuit current	Iscsr	25 000 A

### Mechanical Characteristics

Connection to Network		Through soldering pins
Mounting		On Printed Circuit Board
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		1 mechanical indicator
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		0.075 kg

### Disconnectors


Thermal disconnector		Internal
Back-up protection device		Without

### Standards

Standards compliance		EN 61643-11 / IEC 61643-11 *The standard cover devices. PPV /PAC series are components. Compliant when combined is an assembly.
----------------------	--	---

### Part number

8713207

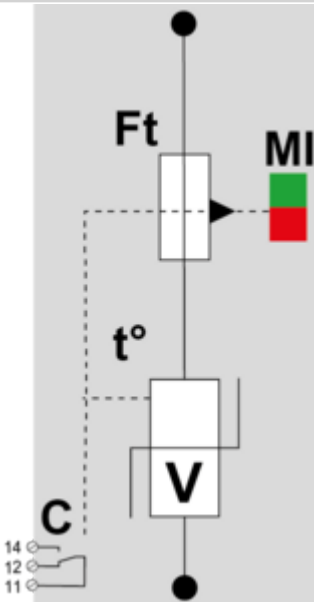

V: High-energy varistor  
 Ft: Thermal fuse  
 C: Remote signal contact  
 t°: Thermal disconnection system  
 MI: Disconnection indicator

