




1-pair DIN rail plug-in Data surge protector

CITEL

DLATS1-24D3/R

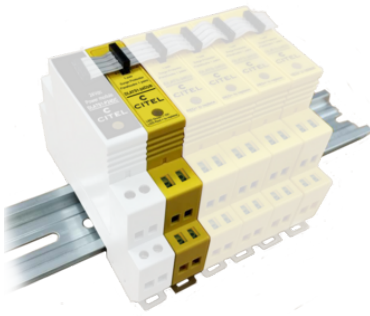

- 1-pair data line/telecom surge protection
- Local and Remote signaling of SPD status
- DIN rail mounting, Screw connect status
- Plug-in module
- 1 monitoring module + SPD modules (up to 48) + bus
- Discharge current I_{max}/I_n : 20 kA / 5kA
- Complies with IEC/EN 61643-21 and UL497A



	Electrical Characteristics																																														
<p>G: 3-electrode gas tube Gb: 2-electrode gas tube PTC: Thermal resistor R: Resistor D: Clamping diode Vi: Indicator</p>	<table border="1"> <tr><td>Network</td><td></td><td>4-20 mA</td></tr> <tr><td>Nominal line voltage</td><td>Un</td><td>24 V</td></tr> <tr><td>Max. DC operating voltage</td><td>Uc</td><td>28 Vdc</td></tr> <tr><td>Max. frequency</td><td>f max.</td><td>> 3 MHz</td></tr> <tr><td>Insertion loss</td><td></td><td>< 1 dB</td></tr> <tr><td>Max. load current @25°C</td><td>IL</td><td>300 mA</td></tr> <tr><td>Max. discharge current max. withstand @ 8/20 μs by pole</td><td>I_{max}</td><td>20 kA</td></tr> <tr><td>Line inductance</td><td></td><td>No</td></tr> <tr><td>Protection mode(s)</td><td></td><td>Common/Differential mode</td></tr> <tr><td>Protection level</td><td></td><td></td></tr> <tr><td>Following the test category C3 (IEC61643-21) - Line/Line</td><td>Up</td><td>40 V</td></tr> <tr><td>Impulse current 2 x 10/350 μs Test - D1 Category</td><td>I_{imp}</td><td>5 kA</td></tr> <tr><td>Nominal discharge current C2 Category</td><td>I_n</td><td>5 kA</td></tr> <tr><td>Line/Line Nominal discharge current C2 Category</td><td>I_n L/L</td><td>5 kA</td></tr> <tr><td>Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category</td><td>I_n L/PE</td><td>5 kA</td></tr> </table>		Network		4-20 mA	Nominal line voltage	Un	24 V	Max. DC operating voltage	Uc	28 Vdc	Max. frequency	f max.	> 3 MHz	Insertion loss		< 1 dB	Max. load current @25°C	IL	300 mA	Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	20 kA	Line inductance		No	Protection mode(s)		Common/Differential mode	Protection level			Following the test category C3 (IEC61643-21) - Line/Line	Up	40 V	Impulse current 2 x 10/350 μs Test - D1 Category	I _{imp}	5 kA	Nominal discharge current C2 Category	I _n	5 kA	Line/Line Nominal discharge current C2 Category	I _n L/L	5 kA	Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category	I _n L/PE	5 kA
Network		4-20 mA																																													
Nominal line voltage	Un	24 V																																													
Max. DC operating voltage	Uc	28 Vdc																																													
Max. frequency	f max.	> 3 MHz																																													
Insertion loss		< 1 dB																																													
Max. load current @25°C	IL	300 mA																																													
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	20 kA																																													
Line inductance		No																																													
Protection mode(s)		Common/Differential mode																																													
Protection level																																															
Following the test category C3 (IEC61643-21) - Line/Line	Up	40 V																																													
Impulse current 2 x 10/350 μs Test - D1 Category	I _{imp}	5 kA																																													
Nominal discharge current C2 Category	I _n	5 kA																																													
Line/Line Nominal discharge current C2 Category	I _n L/L	5 kA																																													
Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category	I _n L/PE	5 kA																																													
<p>Connection ribbons available:</p> <table border="1"> <thead> <tr> <th>Nb of pole</th> <th>Ref. Ribbon</th> </tr> </thead> <tbody> <tr> <td>2 - 5</td> <td>R-BUS 5P (301134)</td> </tr> <tr> <td>6 - 10</td> <td>R-BUS 10P (301133)</td> </tr> <tr> <td>11 - 25</td> <td>R-BUS 25P (301135)</td> </tr> <tr> <td>26 - 49</td> <td>R-BUS 49P (301143)</td> </tr> </tbody> </table>	Nb of pole	Ref. Ribbon	2 - 5	R-BUS 5P (301134)	6 - 10	R-BUS 10P (301133)	11 - 25	R-BUS 25P (301135)	26 - 49	R-BUS 49P (301143)	Mechanical Characteristics																																				
Nb of pole	Ref. Ribbon																																														
2 - 5	R-BUS 5P (301134)																																														
6 - 10	R-BUS 10P (301133)																																														
11 - 25	R-BUS 25P (301135)																																														
26 - 49	R-BUS 49P (301143)																																														
<table border="1"> <tr><td>Technology</td><td colspan="2">GDT+Clamping diode+PTC (thermal resistor) + Resistor</td></tr> <tr><td>SPD configuration</td><td colspan="2">1-pair+shielded</td></tr> <tr><td>Connection to Network</td><td colspan="2">Spring terminal: cross section 0.5-2.5mm²</td></tr> <tr><td>Format</td><td colspan="2">Plug-in DIN box</td></tr> <tr><td>Mounting</td><td colspan="2">Symmetrical rail 35 mm (EN 60715)</td></tr> <tr><td>Housing material</td><td colspan="2">Thermoplastic UL94 V-0</td></tr> <tr><td>Operating temperature</td><td>Tu</td><td>-40/+85°C</td></tr> <tr><td>Protection rating</td><td colspan="2">IP20</td></tr> <tr><td>Failsafe mode</td><td colspan="2">Transmission cut-off - fault mode 2 (short circuit)</td></tr> <tr><td>Disconnection indicator</td><td colspan="2">Red light on</td></tr> <tr><td>Spare module(s)</td><td colspan="2">DLATS1M-24D3</td></tr> <tr><td>Remote signaling of disconnection</td><td colspan="2">Trough control module</td></tr> <tr><td>Remote signaling of disconnection via control module</td><td colspan="2">Yes</td></tr> <tr><td>Dimensions</td><td colspan="2">See diagram</td></tr> <tr><td>Weight</td><td colspan="2">0.066 kg</td></tr> </table>			Technology	GDT+Clamping diode+PTC (thermal resistor) + Resistor		SPD configuration	1-pair+shielded		Connection to Network	Spring terminal: cross section 0.5-2.5mm ²		Format	Plug-in DIN box		Mounting	Symmetrical rail 35 mm (EN 60715)		Housing material	Thermoplastic UL94 V-0		Operating temperature	Tu	-40/+85°C	Protection rating	IP20		Failsafe mode	Transmission cut-off - fault mode 2 (short circuit)		Disconnection indicator	Red light on		Spare module(s)	DLATS1M-24D3		Remote signaling of disconnection	Trough control module		Remote signaling of disconnection via control module	Yes		Dimensions	See diagram		Weight	0.066 kg	
Technology	GDT+Clamping diode+PTC (thermal resistor) + Resistor																																														
SPD configuration	1-pair+shielded																																														
Connection to Network	Spring terminal: cross section 0.5-2.5mm ²																																														
Format	Plug-in DIN box																																														
Mounting	Symmetrical rail 35 mm (EN 60715)																																														
Housing material	Thermoplastic UL94 V-0																																														
Operating temperature	Tu	-40/+85°C																																													
Protection rating	IP20																																														
Failsafe mode	Transmission cut-off - fault mode 2 (short circuit)																																														
Disconnection indicator	Red light on																																														
Spare module(s)	DLATS1M-24D3																																														
Remote signaling of disconnection	Trough control module																																														
Remote signaling of disconnection via control module	Yes																																														
Dimensions	See diagram																																														
Weight	0.066 kg																																														
Standards																																															
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497A																																													
Part number																																															
6417034																																															

