




1-pair DIN rail plug-in Data surge protector

CITEL

DLATS1-06D3/R

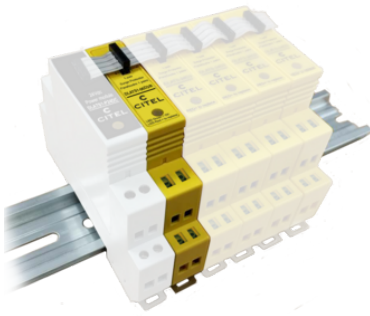

- 1-pair data line/telecom surge protection
- Local and Remote signaling of SPD status
- DIN rail mounting, Screw connect status
- Plug-in module
- 1 monitoring module + SPD modules (up to 48) + bus
- Discharge current I_{max}/I_n : 20 kA / 5kA
- Complies with IEC/EN 61643-21 and UL497A



| | Electrical Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|---|---------|-------------------|--------|----------------------|---------|--------------------|---------------------------|--------------------|--|----------------|-----------------------------------|---------|----------------|------------|--------|--|-------------------|--------|---|-----------------------|-------|---|--------|----|--------------------|----------|--------------------------|---|------------------|------|--|-----------------------|------|---------------------------------------|-------------------|------|---|--------------------|------|---|-------------------------|------|--------------|-----------------|--|--------------|-----------------------------------|--|-----------------------|--|--|-----|------------|--|-------------|--------|--|----------|------------------|--|--|----------------------|--|-------------------------------------|--------------------|--|--|---------|--|--|
| <p>G: 3-electrode gas tube Gb: 2-electrode gas tube PTC: Thermal resistor R: Resistor D : Clamping diode Vi : Indicator</p> | <table border="1"> <tr><td>Network</td><td></td><td>RS422</td></tr> <tr><td>Nominal line voltage</td><td>Un</td><td>6 V</td></tr> <tr><td>Max. DC operating voltage</td><td>Uc</td><td>8 Vdc</td></tr> <tr><td>Max. frequency</td><td>f max.</td><td>> 3 MHz</td></tr> <tr><td>Insertion loss</td><td></td><td>< 1 dB</td></tr> <tr><td>Max. load current @25°C</td><td>IL</td><td>300 mA</td></tr> <tr><td>Max. discharge current max. withstand @ 8/20 μs by pole</td><td>I_{max}</td><td>20 kA</td></tr> <tr><td>Line inductance</td><td></td><td>No</td></tr> <tr><td>Protection mode(s)</td><td></td><td>Common/Differential mode</td></tr> <tr><td>Protection level Following the test category C3 (IEC61643-21) - Line/Line</td><td>Up</td><td>20 V</td></tr> <tr><td>Impulse current 2 x 10/350 μs Test - D1 Category</td><td>I_{imp}</td><td>5 kA</td></tr> <tr><td>Nominal discharge current C2 Category</td><td>I_n</td><td>5 kA</td></tr> <tr><td>Line/Line Nominal discharge current C2 Category</td><td>I_n L/L</td><td>5 kA</td></tr> <tr><td>Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category</td><td>I_n L/PE</td><td>5 kA</td></tr> </table> | | Network | | RS422 | Nominal line voltage | Un | 6 V | Max. DC operating voltage | Uc | 8 Vdc | Max. frequency | f max. | > 3 MHz | Insertion loss | | < 1 dB | Max. load current @25°C | IL | 300 mA | Max. discharge current max. withstand @ 8/20 μs by pole | I _{max} | 20 kA | Line inductance | | No | Protection mode(s) | | Common/Differential mode | Protection level Following the test category C3 (IEC61643-21) - Line/Line | Up | 20 V | Impulse current 2 x 10/350 μs Test - D1 Category | I _{imp} | 5 kA | Nominal discharge current C2 Category | I _n | 5 kA | Line/Line Nominal discharge current C2 Category | I _n L/L | 5 kA | Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category | I _n L/PE | 5 kA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Network | | RS422 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nominal line voltage | Un | 6 V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max. DC operating voltage | Uc | 8 Vdc | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max. frequency | f max. | > 3 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Insertion loss | | < 1 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max. load current @25°C | IL | 300 mA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max. discharge current max. withstand @ 8/20 μs by pole | I _{max} | 20 kA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Line inductance | | No | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Protection mode(s) | | Common/Differential mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Protection level Following the test category C3 (IEC61643-21) - Line/Line | Up | 20 V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Impulse current 2 x 10/350 μs Test - D1 Category | I _{imp} | 5 kA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nominal discharge current C2 Category | I _n | 5 kA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Line/Line Nominal discharge current C2 Category | I _n L/L | 5 kA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category | I _n L/PE | 5 kA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Connection ribbons available:</p> <table border="1"> <thead> <tr> <th>Nb of pole</th> <th>Ref. Ribbon</th> </tr> </thead> <tbody> <tr> <td>2 - 5</td> <td>R-BUS 5P (301134)</td> </tr> <tr> <td>6 - 10</td> <td>R-BUS 10P (301133)</td> </tr> <tr> <td>11 - 25</td> <td>R-BUS 25P (301135)</td> </tr> <tr> <td>26 - 49</td> <td>R-BUS 49P (301143)</td> </tr> </tbody> </table> | Nb of pole | Ref. Ribbon | 2 - 5 | R-BUS 5P (301134) | 6 - 10 | R-BUS 10P (301133) | 11 - 25 | R-BUS 25P (301135) | 26 - 49 | R-BUS 49P (301143) | <table border="1"> <tr> <td colspan="3">Mechanical Characteristics</td> </tr> <tr><td>Technology</td><td></td><td>GDT+Clamping diode+PTC (thermal resistor) + Resistor</td></tr> <tr><td>SPD configuration</td><td></td><td>1-pair+shielded</td></tr> <tr><td>Connection to Network</td><td></td><td>Spring terminal: cross section 0.5-2.5mm²</td></tr> <tr><td>Format</td><td></td><td>Plug-in DIN box</td></tr> <tr><td>Mounting</td><td></td><td>Symmetrical rail 35 mm (EN 60715)</td></tr> <tr><td>Housing material</td><td></td><td>Thermoplastic UL94 V-0</td></tr> <tr><td>Operating temperature</td><td>Tu</td><td>-40/+85°C</td></tr> <tr><td>Protection rating</td><td></td><td>IP20</td></tr> <tr><td>Failsafe mode</td><td></td><td>Transmission cut-off - fault mode 2 (short circuit)</td></tr> <tr><td>Disconnection indicator</td><td></td><td>Red light on</td></tr> <tr><td>Spare module(s)</td><td></td><td>DLATS1M-06D3</td></tr> <tr><td>Remote signaling of disconnection</td><td></td><td>Trough control module</td></tr> <tr><td>Remote signaling of disconnection via control module</td><td></td><td>Yes</td></tr> <tr><td>Dimensions</td><td></td><td>See diagram</td></tr> <tr><td>Weight</td><td></td><td>0.066 kg</td></tr> <tr> <td colspan="3">Standards</td> </tr> <tr><td>Standards compliance</td><td></td><td>IEC 61643-21 / EN 61643-21 / UL497A</td></tr> <tr> <td colspan="3">Part number</td> </tr> <tr><td>6417014</td><td></td><td></td></tr> </table> | | Mechanical Characteristics | | | Technology | | GDT+Clamping diode+PTC (thermal resistor) + Resistor | SPD configuration | | 1-pair+shielded | Connection to Network | | Spring terminal: cross section 0.5-2.5mm ² | Format | | Plug-in DIN box | Mounting | | Symmetrical rail 35 mm (EN 60715) | Housing material | | Thermoplastic UL94 V-0 | Operating temperature | Tu | -40/+85°C | Protection rating | | IP20 | Failsafe mode | | Transmission cut-off - fault mode 2 (short circuit) | Disconnection indicator | | Red light on | Spare module(s) | | DLATS1M-06D3 | Remote signaling of disconnection | | Trough control module | Remote signaling of disconnection via control module | | Yes | Dimensions | | See diagram | Weight | | 0.066 kg | Standards | | | Standards compliance | | IEC 61643-21 / EN 61643-21 / UL497A | Part number | | | 6417014 | | |
| Nb of pole | Ref. Ribbon | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 - 5 | R-BUS 5P (301134) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 - 10 | R-BUS 10P (301133) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 - 25 | R-BUS 25P (301135) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 - 49 | R-BUS 49P (301143) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mechanical Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Technology | | GDT+Clamping diode+PTC (thermal resistor) + Resistor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SPD configuration | | 1-pair+shielded | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Connection to Network | | Spring terminal: cross section 0.5-2.5mm ² | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Format | | Plug-in DIN box | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mounting | | Symmetrical rail 35 mm (EN 60715) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Housing material | | Thermoplastic UL94 V-0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating temperature | Tu | -40/+85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Protection rating | | IP20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Failsafe mode | | Transmission cut-off - fault mode 2 (short circuit) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Disconnection indicator | | Red light on | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Spare module(s) | | DLATS1M-06D3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Remote signaling of disconnection | | Trough control module | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Remote signaling of disconnection via control module | | Yes | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dimensions | | See diagram | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Weight | | 0.066 kg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Standards | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Standards compliance | | IEC 61643-21 / EN 61643-21 / UL497A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Part number | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6417014 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

