
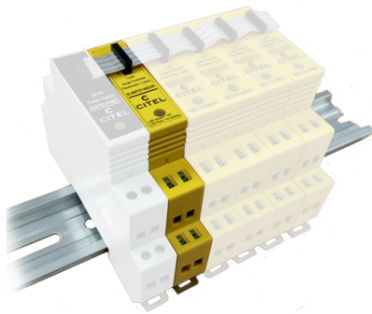
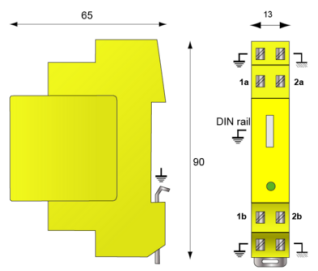


DLAWTS1-06D3/R

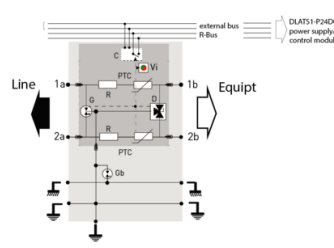

- Surge protection for 1-pair
- Pluggable protection module
- Optical fault indication
- Remote signalling (DLAWTS1-48DC required for power supply)
- Indirect shield connection
- Indirect earthing
- Signal interruption when module is disconnected
- Conforms to IEC 61643-21, VDE 0845-3-1 and UL497A

	<table border="1"> <thead> <tr> <th colspan="2">Electrical Characteristics</th> </tr> </thead> <tbody> <tr> <td>Network</td> <td>RS422</td> </tr> <tr> <td>Max. AC operating voltage</td> <td>Uc 6 V</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc 8 V</td> </tr> <tr> <td>Max. frequency</td> <td>f max. > 3 MHz</td> </tr> <tr> <td>Insertion loss</td> <td>< 1 dB</td> </tr> <tr> <td>Max. load current</td> <td>IL 300 mA</td> </tr> <tr> <td>Max. discharge current (max. withstand @ 8/20 µs by pole)</td> <td>Imax 20 kA</td> </tr> <tr> <td>Line inductance</td> <td>No</td> </tr> <tr> <td>Protection mode(s)</td> <td>Common/Differential mode</td> </tr> <tr> <td>Protection level(Following the test category C3 (IEC61643-21) - Line/Line)</td> <td>Up 20 V</td> </tr> <tr> <td>Max. capacitance</td> <td>C < 50 pF</td> </tr> <tr> <td>Impulse current(2 x 10/350µs Test - D1 Category)</td> <td>Iimp 5 kA</td> </tr> <tr> <td>Nominal discharge current(8/20µs Test x 10 - C2 Category)</td> <td>In 5 kA</td> </tr> <tr> <td>Line/Line Nominal discharge current (8 /20µs Test x 10 - C2 Category)</td> <td>In L/L 5 kA</td> </tr> <tr> <td>Line/Ground Nominal discharge current (8 /20µs Test x 10 - C2 Category)</td> <td>In L/PE 5 kA</td> </tr> </tbody> </table>	Electrical Characteristics		Network	RS422	Max. AC operating voltage	Uc 6 V	Max. DC operating voltage	Uc 8 V	Max. frequency	f max. > 3 MHz	Insertion loss	< 1 dB	Max. load current	IL 300 mA	Max. discharge current (max. withstand @ 8/20 µs by pole)	Imax 20 kA	Line inductance	No	Protection mode(s)	Common/Differential mode	Protection level(Following the test category C3 (IEC61643-21) - Line/Line)	Up 20 V	Max. capacitance	C < 50 pF	Impulse current(2 x 10/350µs Test - D1 Category)	Iimp 5 kA	Nominal discharge current(8/20µs Test x 10 - C2 Category)	In 5 kA	Line/Line Nominal discharge current (8 /20µs Test x 10 - C2 Category)	In L/L 5 kA	Line/Ground Nominal discharge current (8 /20µs Test x 10 - C2 Category)	In L/PE 5 kA
Electrical Characteristics																																	
Network	RS422																																
Max. AC operating voltage	Uc 6 V																																
Max. DC operating voltage	Uc 8 V																																
Max. frequency	f max. > 3 MHz																																
Insertion loss	< 1 dB																																
Max. load current	IL 300 mA																																
Max. discharge current (max. withstand @ 8/20 µs by pole)	Imax 20 kA																																
Line inductance	No																																
Protection mode(s)	Common/Differential mode																																
Protection level(Following the test category C3 (IEC61643-21) - Line/Line)	Up 20 V																																
Max. capacitance	C < 50 pF																																
Impulse current(2 x 10/350µs Test - D1 Category)	Iimp 5 kA																																
Nominal discharge current(8/20µs Test x 10 - C2 Category)	In 5 kA																																
Line/Line Nominal discharge current (8 /20µs Test x 10 - C2 Category)	In L/L 5 kA																																
Line/Ground Nominal discharge current (8 /20µs Test x 10 - C2 Category)	In L/PE 5 kA																																
 <p>G: 3-electrode gas tube Gb: 2-electrode gas tube PTC: Thermal resistor R: Resistor D: Clamping diode Vi: Indicator</p>	<table border="1"> <thead> <tr> <th colspan="2">Mechanical Characteristics</th> </tr> </thead> <tbody> <tr> <td>Technology</td> <td>GDT+Clamping diode+PTC (thermal resistor) + Resistor</td> </tr> <tr> <td>SPD configuration</td> <td>1-pair + shielded</td> </tr> <tr> <td>Connection to Network</td> <td>Spring terminal: cross section 0.4-1.5 mm²</td> </tr> <tr> <td>Format</td> <td>Plug-in DIN box</td> </tr> <tr> <td>Mounting</td> <td>Symmetrical rail 35 mm (EN 60715)</td> </tr> <tr> <td>Housing material</td> <td>Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating temperature</td> <td>Tu -40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td>Specific version with line cut-off in case of removal plug-in module</td> </tr> <tr> <td>Disconnection indicator</td> <td>Red light on</td> </tr> <tr> <td>Spare module(s)</td> <td>DLAWTS1M-06D3</td> </tr> <tr> <td>Remote signaling of disconnection</td> <td>Trough control module</td> </tr> <tr> <td>Dimensions</td> <td>See diagram</td> </tr> <tr> <td>Weight</td> <td>0.063 kg</td> </tr> </tbody> </table>	Mechanical Characteristics		Technology	GDT+Clamping diode+PTC (thermal resistor) + Resistor	SPD configuration	1-pair + shielded	Connection to Network	Spring terminal: cross section 0.4-1.5 mm ²	Format	Plug-in DIN box	Mounting	Symmetrical rail 35 mm (EN 60715)	Housing material	Thermoplastic UL94 V-0	Operating temperature	Tu -40/+85°C	Protection rating	IP20	Failsafe mode	Specific version with line cut-off in case of removal plug-in module	Disconnection indicator	Red light on	Spare module(s)	DLAWTS1M-06D3	Remote signaling of disconnection	Trough control module	Dimensions	See diagram	Weight	0.063 kg		
Mechanical Characteristics																																	
Technology	GDT+Clamping diode+PTC (thermal resistor) + Resistor																																
SPD configuration	1-pair + shielded																																
Connection to Network	Spring terminal: cross section 0.4-1.5 mm ²																																
Format	Plug-in DIN box																																
Mounting	Symmetrical rail 35 mm (EN 60715)																																
Housing material	Thermoplastic UL94 V-0																																
Operating temperature	Tu -40/+85°C																																
Protection rating	IP20																																
Failsafe mode	Specific version with line cut-off in case of removal plug-in module																																
Disconnection indicator	Red light on																																
Spare module(s)	DLAWTS1M-06D3																																
Remote signaling of disconnection	Trough control module																																
Dimensions	See diagram																																
Weight	0.063 kg																																
<table border="1"> <thead> <tr> <th colspan="2">Standards</th> </tr> </thead> <tbody> <tr> <td>Standards compliance</td> <td>IEC 61643-21 / EN 61643-21 / UL497A</td> </tr> </tbody> </table>		Standards		Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A																												
Standards																																	
Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A																																
<table border="1"> <thead> <tr> <th colspan="2">Part number</th> </tr> </thead> <tbody> <tr> <td colspan="2">6421014</td> </tr> </tbody> </table>		Part number		6421014																													
Part number																																	
6421014																																	