




CITEL

Power Supply / control module

DLATS1-P24DC

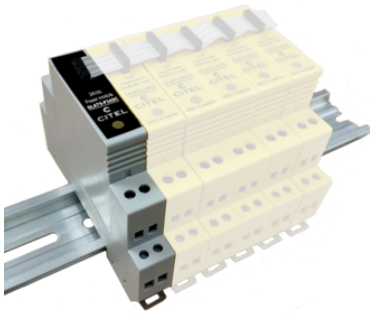

Connection ribbons available:

| Nb of pole | Ref. Ribbon |
|------------|--------------------|
| 2 - 5 | R-BUS 5P (301134) |
| 6 - 10 | R-BUS 10P (301133) |
| 11 - 25 | R-BUS 25P (301135) |
| 26 - 49 | R-BUS 49P (301143) |

| Electrical Characteristics | | |
|-----------------------------|----|------------------------------------------------------------------------------------------|
| Nominal line voltage | Un | 24 Vdc |
| Mechanical Characteristics | | |
| Connection to Network | | By screw terminal: cross section 0.4-1.5mm ² or spring terminal (DLATS-xxx/R) |
| Format | | 1-pole modular box assembled |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Voltage/operating indicator | | Green / Red |
| Dimensions | | See diagram |
| Weight | | 0.019 kg |
| Standards | | |
| Standards compliance | | IEC 61643-21 / EN 61643-21 / UL497B / GBT 18802.21 |
| Part number | | |
| 6417231 | | |

