





Type 1+2+3 AC surge protector - 3-phase+N

CITEL

DACN1-25VGS-40-760

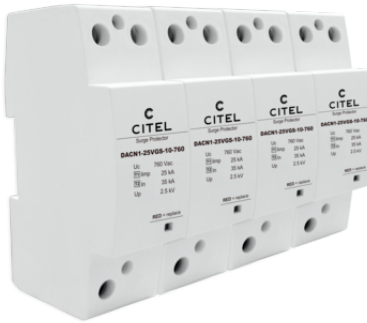

- Type 1 + 2+3 AC surge protector
- VG Technology
- In: 35 kA
- Iimp: 25 kA on 10/350µs impulse
- No leakage current
- Unpluggable module for each phase
- Remote signaling
- Optimized to TOV
- EN 61643-11, IEC 61643-11 certified

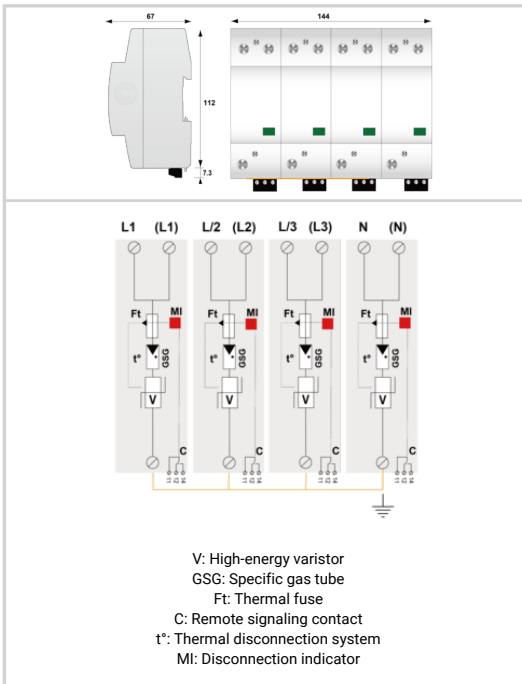

Electrical Characteristics	
SPD type	1+2+3
Network	400/690 V 3-phase+N
Max. AC operating voltage	Uc 760 Vac
Max. load current @25°C	IL 100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 1000 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 1325 Vac disconnection
Residual Current Leakage current to Ground	Ipe None
Follow current	If None
Nominal discharge current 15 x 8/20 µs impulses	In 35 kA
Max. discharge current max. withstand @ 8/20 µs by pole	I _{max} 70 kA
Impulse current by pole max. withstand 10/350µs by pole	I _{imp} 25 kA
Total lightning current max. total withstand @ 10/350µs	I _{total} 100 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50µs - 8/20µs	Uoc 6 kV
Specific energy by pole max. withstand 10/350 µs	W/R 156 kJ/ohm
Protection mode(s)	L/PE and N/PE
Protection level @ In (8/20µs) and @ 6 kV (1,2/50 µs)	Up 2.5 kV
Protection level L/PE @ In (8/20µs)	Up L/PE 2.5 kV
Residual voltage L/PE at 5 kA @ 5 kA (8/20µs)	Up-5kA 1.6 kV
Admissible short-circuit current	I _{sc} 50 000 A
Mechanical Characteristics	
Technology	VG Technology (MOV+GSG)
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format	1-pole modular box assembled
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole - Red/Green
Remote signaling of disconnection	Output on changeover contact
Wiring for remote signaling	1.5 mm ² max.
Max. Voltage/Current for remote signaling	250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions	See diagram - 8TE (EN43880)
Weight	1.920 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	Fuse assembly: SFD1-25-40S / or Fuses Type gG 315 A
Standards	
Standards compliance	EN 61643-11 / IEC 61643-11
Certification	TUV
Part number	29224012

