




- Surge protection for telecommunication applications
- Protection of VDSL2, VDSL, DSL, ISDN and analog terminals
- Extended frequency range up to 400 MHz
- Wall mounting



Electrical Characteristics		
Network		RTC, ADSL2, VDSL2
Nominal line voltage	Un	180 V
Max. DC operating voltage	Uc	180 Vdc
Max. frequency	f max.	400 MHz
Insertion loss		< 3 dB
Max. load current @25°C	IL	750 mA
Protection level @ In (8/20 μs)	Up L/PE	< 280 V
Impulse current 2 x 10/350 μs Test - D1 Category	Iimp	2.5 kA
Nominal discharge current C2 Category	In	15 kA
Mechanical Characteristics		
Technology		GDT+Clamping diode
SPD configuration		1 pair
Connection to Network		Spring terminal: cross section 0.5-2.5mm ²
Format		Wall mounting box
Mounting		Wall mounting by screws (not supplied)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP55
Failsafe mode		Short-circuit - transmission cut-off - fault mode 2
Dimensions		See diagram
Weight		0.130 kg
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21
Part number		
6400066		

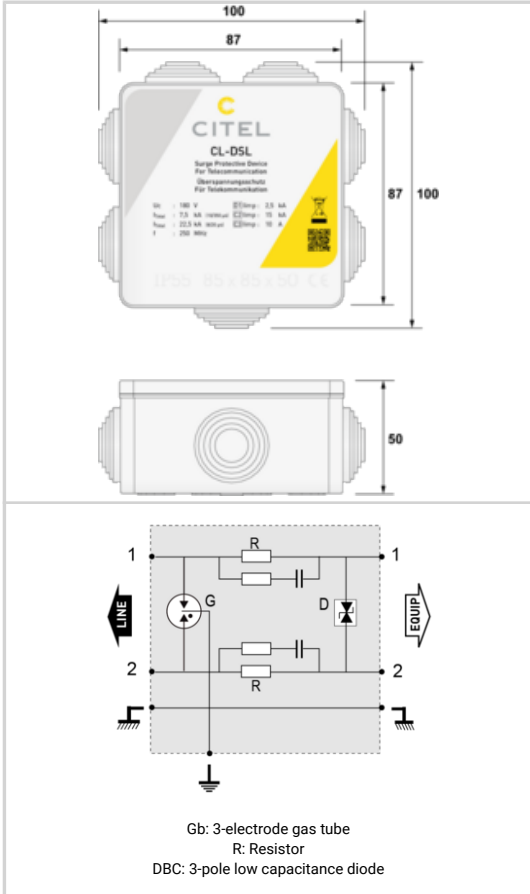