




CITEL

Compact Type 2 (or 3) DC surge protector - 65 V - Monobloc

DDCN06S-21YG-65



- DC Power Type 2+3 SPD
- 2-port configuration (series mounting)
- Compact and Cost effective
- In/Imax: 2 kA/6 kA
- Max. load current: 25A
- Disconnection + AC line cut
- Remote signaling
- EN 61643-11, IEC 61643-11 compliance

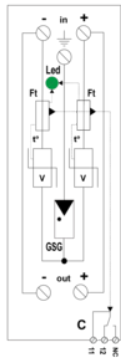

V: High-energy varistor
 GSG: Specific Gas Tube
 LED: Disconnection indicator
 Ft: Thermal fuse
 t*: Thermal disconnection system
 C: Remote signaling contact

Electrical Characteristics		
Nominal DC voltage	Un-dc	48 Vdc
Max. DC operating voltage	Uc	65 Vdc
Max. load current @25°C	IL	25 A
Residual Current Leakage current to Ground	Ipe	None
Nominal discharge current 15 x 8/20 µs impulses	In	2 kA
Max. discharge current max. withstand @ 8/20 µs by pole	Imax	6 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50µs - 8/20µs	Uoc	4 kV
Connection mode(s)		+/-/PE
Protection level +/- @ In (8/20µs)	Up	0.5 kV
Protection level +/-PE (-/PE) @ In (8/20µs)	Up	0.8 kV
Admissible short-circuit current	Iscsr	10 000 A
Mechanical Characteristics		
SPD configuration		Single phase
Connection to Network		By screw terminals: 1.5-10mm²
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		Green LED OFF
Remote signaling of disconnection		output on NC contact
Dimensions		See diagram - 1TE (EN43880)
Weight		0.089 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Fuses type gG - 25A
Standards		
Standards compliance		IEC 61643-11 / prIEC 61643-11
Part number		
70134052		

