




- Junction box for 1 MPP-Tracker / 1 String
- Surge protection integrated
- Protection rating IP65
- Connection cables pre-assembled with MC4 connectors



Electrical Characteristics	
SPD type	1+2+3
Network	PV network 1000 Vdc
Nominal DC voltage	Un-dc 1000 Vdc
Rated insulation voltage <i>U_i</i>	U _i 1000 Vdc
Rated current <i>I_{nA}</i>	I _{nA} 20 A
Rated string current <i>I_{nC}</i>	I _{nC} 20 A
Mechanical Characteristics	
Housing material	UV and ozone resistant, glass fibre reinforced polycarbonate
Dimensions	See diagram
Input / per MPPT	MC4 plug 1x 6mm ² with 15cm connection cable
Output / per MPPT	MC4-Stecker 1x 6mm ² mit 120cm Anschlussleitung
Ground connection terminal	Screw terminal 2.5-25mm ² (35mm ²)
Cable gland	Metric / 1x M24 (Ø 6-12mm) PE
Housing material	UV and ozone resistant, fiberglass reinforced polycarbonate with semi-transparent cover
Dimensions	WxHxD (mm): 254 x 180 x 111
Ambient temperatures	Indoor: -5°C to max. +40°C (+35°C 24h average) / Outdoor: -25°C to max. +40°C (+35°C 24h average)
Humidity	Indoor: max. 50% at +40°C, max. 90% at 20°C (non-condensing) / Outdoor: 95% for a short time at +25°C (non-condensing)
Protection rating	IP 65
Protection class	Class II
Impact resistance	IK 8
Pressure compensation element	Existing
Standards	
Standards compliance	DIN EN 50539-11 / DIN EN IEC 61439-2
Part number	
156964	

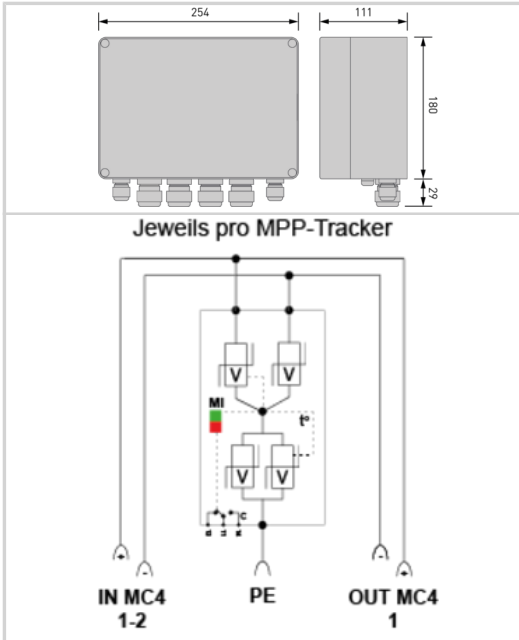