



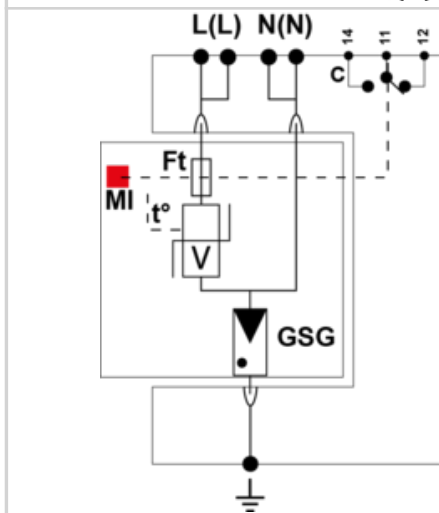

- › Discover our latest innovation : the [DAC40CS-11-320](#)
- › Compact single-phase Type 2 surge protector
- › In : 20 kA
- › I_{max} : 40 kA
- › Common/Differential mode
- › Pluggable module
- › Remote signaling
- › EN 61643-11, IEC 61643-11 compliance
- › UL1449 ed.5

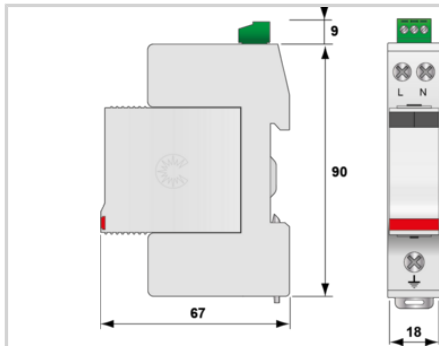

V: High-energy varistor
GSG: Specific gas tube
Ft: Thermal fuse
C: Remote signaling contact
t*: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics

SPD type	2
Network	230 V single-phase
AC system	TT-TN
Nominal line voltage	Un 230 Vac
Max. AC operating voltage	Uc 320 Vac
Max. load current if series connection	IL 20 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT 1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	I _{pe} None
Follow current	I _f None
Nominal discharge current 15 x 8/20 μ s impulses	I _n 20 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	I _{max} 40 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	I _{max} Total 40 kA
Protection mode(s)	Common/Differential mode
Residual voltage at 5 kA @ 5 kA (8/20 μ s)	Up-5kA 1.5/1 kV
Protection level CM/DM @ I _n (8/20 μ s)	Up mc /md 1.5/1.5 kV
Admissible short-circuit current	I _{sc} 10 000 A

Mechanical Characteristics

Technology	MOV
SPD configuration	Single phase
Connection to Network	By screw terminals: 1.5-10mm ² (L/N) or 2.5-25mm ² (PE)
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator
Spare module(s)	DSM240-320/G
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram

Disconnectors

Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	Fuses type gG - 50 A

Standards

Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	UL Recognized

Part number

311931