




Ultra Compact Type 3 hard wired surge protector

CITEL

MSB6-24/LD



- Ultra compact type 3 surge protector
- 24 Vac or 24 Vdc version available
- LED indicator
- IP20
- EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

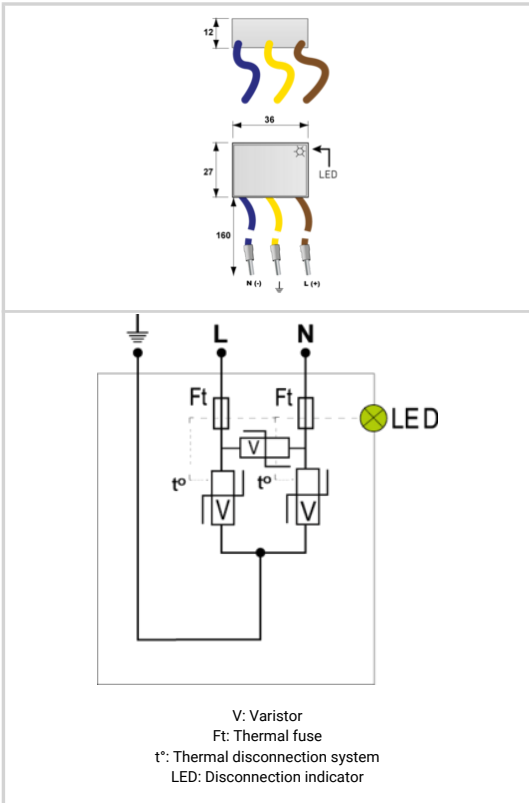

Electrical Characteristics		
SPD type		3
Network		24V supply
Nominal line voltage	Un	24 V
Max. AC operating voltage	Uc	30 Vac
Max. DC operating voltage	Uc	38 Vdc
Follow current	If	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	In	0.5 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	2 kA
Withstand on Combination waveform IEC 61643-11 <i>Class III test: 1.2/50μs - 8/20μs</i>	Uoc	1 kV
Protection mode(s)		Common/Differential mode
3195734	UP L/N	0,18 kV
3195735	UP L/PE	0,18 kV
Mechanical Characteristics		
Technology		MOV
Connection to Network		Wires
Mounting		AC outlet or screw terminal
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		Green LED OFF
Voltage/operating indicator		Green Led ON
Dimensions		See diagram
Weight		0.022 kg
Disconnectors		
Thermal disconnector		Internal
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		
Part number		
561313		

