




- ✦ Type 1 + 2 unipolar surge protector
- ✦ Iimp total: 150 kA on 10/350µs impulse
- ✦ I<sub>max</sub> : 200 kA on 8/20µs impulse
- ✦ Internal disconnections, status indicators
- ✦ Remote signaling
- ✦ IEC 61643-11, EN 61643-11 and UL1449 ed.5 compliance

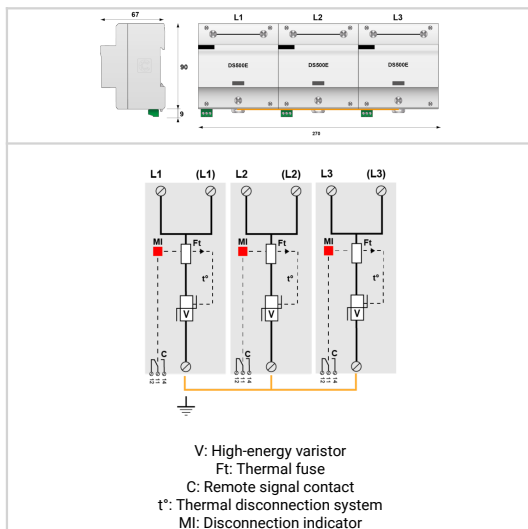

Electrical Characteristics		
SPD type	IEC	1+2
Network		230/400 V 3-phase
AC system		TNC
Nominal line voltage	U <sub>n</sub>	230 Vac
Max. AC operating voltage	U <sub>c</sub>	320 Vac
Max. load current if series connection	I <sub>L</sub>	100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Follow current	I <sub>f</sub>	None
Nominal discharge current 15 x 8/20 µs impulses	I <sub>n</sub>	50 kA
Max. discharge current max. withstand @ 8/20 µs by pole	I <sub>max</sub>	200 kA
Impulse current by pole max. withstand 10/350µs by pole	I <sub>imp</sub>	50 kA
Total lightning current max. total withstand @ 10/350µs	I <sub>total</sub>	150 kA
Specific energy by pole max. withstand 10/350 µs	W/R	156 kJ/ohm
Connection mode(s)		L/PE
Protection mode(s)		Common mode
Protection level L/PE @ I <sub>n</sub> (8/20µs)	U <sub>p</sub> L/PE	1.8 kV
Residual voltage L/PE at 5 kA @ 5 kA (8/20µs)	U <sub>p-5kA</sub>	1.2 kV
Admissible short-circuit current	I <sub>sc</sub>	50 000 A
Mechanical Characteristics		
Technology		MOV
SPD configuration		3-phase
Connection to Network		By screw terminals: 6-35mm <sup>2</sup> / by bus
Format		1-pole modular box assembled
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		1.8 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses Type gG - 500 A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		
Part number		
64023		