






CITEL

Type 2 PV surge protector

DS50VGPVS-600G/51

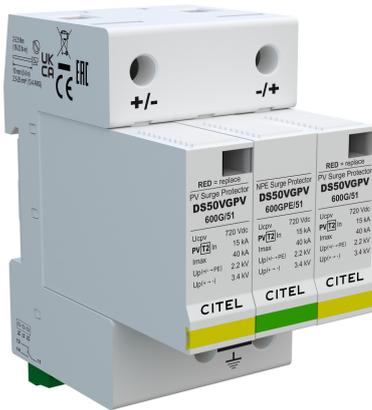

- ▶ Type 2 surge protector for photovoltaic
- ▶ VG technology
- ▶ 600 Vdc
- ▶ No leakage, no operating currents
- ▶ Improved life expectancy
- ▶ I_n/I_{max} : 15 / 40 kA
- ▶ Common/Differential mode protection
- ▶ Remote signaling
- ▶ IEC 61643-31, EN 61643-31, EN 50539-11, UL1449 ed.5 compliance

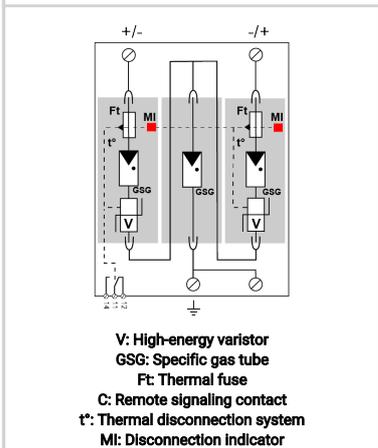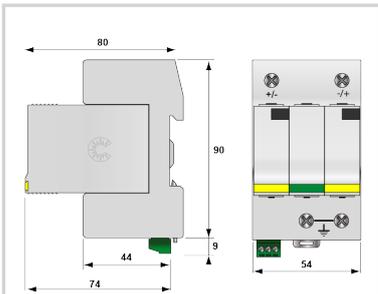

Electrical Characteristics

SPD type	IEC	2
Network		PV 500 Vdc
Nominal PV voltage	Uocstc	600 Vdc
Max. PV operating voltage	Ucpv	720 Vdc
Residual Current Leakage current to Ground	Ipe	None
PV Permanent Operating current Current consumption at Ucpv	Icpv	None
Follow current	I _f	None
Nominal discharge current 15 x 8/20 μs impulses	I _n	15 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total	60 kA
Current withstand short circuit PV	I _{scpv}	1000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level +/- @ I _n (8/20μs)	U _p	3.4 kV
Protection level +/-PE (-/PE) @ I _n (8/20μs)	U _p	2.2 kV

Mechanical Characteristics

Technology		VG Technology (MOV+GSG)
Connection to Network		By screw terminals: 2.5-25mm ²
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection SPD of the PV line
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM50VGPV-600G/51
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram

Disconnectors

Thermal disconnector		Internal
Back-up protection device		Without

Standards

Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
----------------------	--	--

Part number

481411

