



DACN1-25VGS-30-440

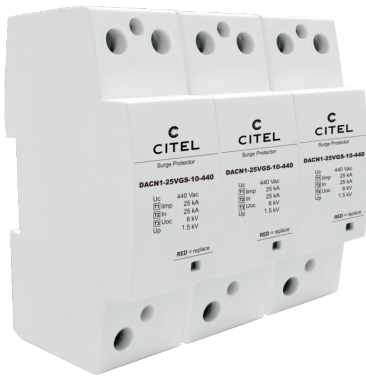

- ✦ Type 1 + 2+3 AC surge protector
- ✦ VG Technology
- ✦ In: 25 kA
- ✦ I_{imp}: 25 kA on 10/350µs impulse
- ✦ No leakage current
- ✦ Unpluggable module for each phase
- ✦ Remote signaling
- ✦ Optimized to TOV
- ✦ EN 61643-11, IEC 61643-11 complied

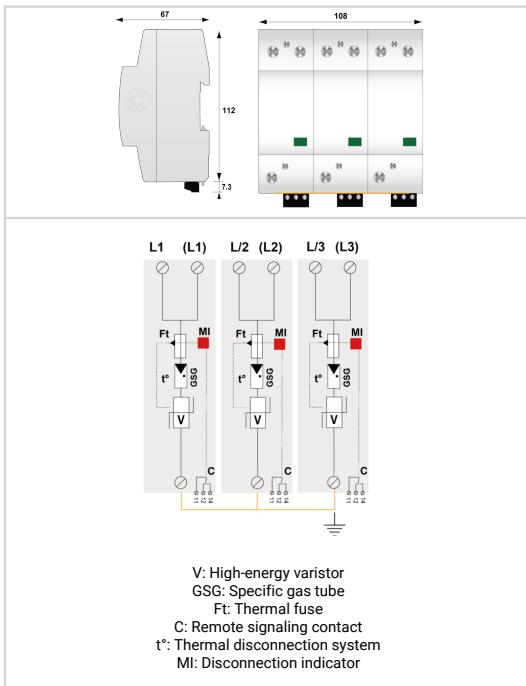

Electrical Characteristics		
SPD type	IEC	1+2+3
Max. AC operating voltage	U _c	440 Vac
Max. load current @25°C	IL	100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	580 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	770 Vac disconnection
Residual Current Leakage current to Ground	I _{pe}	None
Follow current	I _f	None
Nominal discharge current 15 x 8/20 µs impulses	I _n	25 kA
Max. discharge current max. withstand @ 8/20 µs by pole	I _{max}	70 kA
Total Maximum discharge current max. total withstand @ 8/20 µs	I _{max} Total	140 kA
Impulse current by pole max. withstand 10/350µs by pole	I _{imp}	25 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50µs - 8/20µs	U _{oc}	6 kV
Specific energy by pole max. withstand 10/350 µs	W/R	156 kJ/ohm
Protection level @ I _n (8/20µs) and @ 6 kV (1.2/50 µs)	U _p	1.5 kV
Admissible short-circuit current	I _{sc}	50 000 A
Mechanical Characteristics		
Technology		VG Technology (MOV+GSG)
SPD configuration		Single phase
Connection to Network		By screw terminals: 6-35mm ² / by bus
Format		1-pole modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator - Red/Green
Remote signaling of disconnection		Output on changeover contact
Wiring for remote signaling		1.5 mm ² max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions		See diagram - 2TE (EN43880)
Weight		1.244 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 315 A
Standards		
Standards compliance		EN 61643-11 / IEC 61643-11
Part number		
29223022		